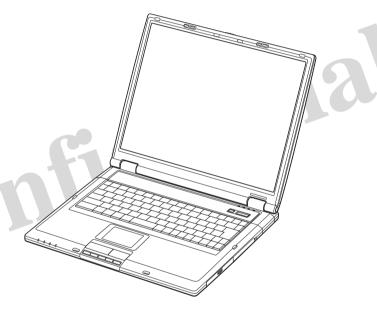# PCG-GRT99/GRT77/GRT55/GRT170/GRT150/GRT25F/GRT160/ PCG-GRT716S/GRT796HP/GRT715E/GRT795MP/GRT715M/GRT796SP/GRT786M/ PCG-GRT785B/GRT785E/GRT30P/GRT25/GRT30LP/GRT30CP/GRT25CP/GRT25L

SERVICE MANUAL

Ver 8-2005F

Revision History

Area	Model	Line up
Japanese	Japanese	PCG-GRT99/P PCG-GRT77/B PCG-GRT55/B
American	US Canadian	PCG-GRT170 PCG-GRT150 PCG-GRT160 — ⚠2 [MA]
	Latin	PCG-GRT25F
European	AEP UK	PCG-GRT716S PCG-GRT796HP PCG-GRT715E PCG-GRT795MP PCG-GRT715M PCG-GRT796SP — ⚠1 [MA]
		PCG-GRT785B PCG-GRT785E PCG-GRT786M — ⚠3 [MA]
Asian/Oceania/ South Africa	International	PCG-GRT30P PCG-GRT25 — ⚠1 [MA]
	Korean	PCG-GRT30LP — ⚠2 [MA] PCG-GRT25L — ⚠3 [MA]
	Chinese	PCG-GRT30CP PCG-GRT25CP — ⚠2 [MA]

Illust : PCG-GRT99/P

WiFi ™
The Standard for
Wireless Fidelity.

i ™ S400

MEMORY STICK ™

VAIO

• 本機の仕様および外観は, 改良のため予告なく変更
　することがありますが, ご了承ください。

• Design and specifications are subject to
change without notice.

NOTEBOOK COMPUTER

SONY ®

Information in this document is subject to change without notice.

Sony, VAIO and CLIE are trademarks or registered trademarks of Sony. Microsoft, Windows, Windows Media, Outlook, Bookshelf and other Microsoft products are trademarks or registered trademarks
of Microsoft Corporation in the United States and other countries.
The word Bluetooth and the Bluetooth logo are trademarks of Bluetooth SIG, Inc. AMD, AMD logo, AMD Duron and combinations thereof, 3DNow!, are trademarks of Advanced Micro Devices, Inc. Intel Inside logo, Pentium and Celeron are trademarks or registered trademarks of Intel Corporation. Transmeta, the Transmeta logo, Crusoe Processor, the Crusoe logo and combinations thereof are trademarks of Transmeta Corporation in the USA and other countries. Graffiti, HotSync, PalmModem, and Palm OS are resistered trademarks, and the Hotsync logo and Palm are trademarks of Palm, Inc. or its subsidiaries. (M) and Motrola are trademarks of Motrora, Inc. Other Motrola products and services with (R) mark like Dragomball are the trademarks of Motrola, Inc.

All other names of systems, products and services in this manual are trademarks or registered trademarks of their respective owners.
In this manual, the (TM) or (R) mark are not specified.

Caution Markings for Lithium/Ion Battery - The following or similar texts shall be provided on battery pack of equipment or in both the operating and the service instructions.

CAUTION: Danger of explosion if battery is incorrectly replaced. Replace only with the same or equivalent type recommended by the manufacturer. Discard used batteries according to the manufacturer's instructions.

CAUTION: The battery pack used in this device may present a fire or chemical burn hazard if mistreated. Do not disassemble, heat above 100°C (212°F) or incinerate.
Dispose of used battery promptly.
Keep away from children.

CAUTION: Changing the back up battery.
• Overcharging, short circuiting, reverse charging, multilation or incineration of the cells must be avoided to prevent one or more of the following occurrences; release of toxic materials, release of hydrogen and/or oxygen gas, rise in surface temperature.
• If a cell has leaked or vented, it should be replaced immediately while avoiding to touch it without any protection.

Service and Inspection Precautions

1. Obey precautionary markings and instructions

Labels and stamps on the cabinet, chassis, and components identify areas requiring special precautions. Be sure to observe these precautions, as well as all precautions listed in the operating manual and other associated documents.

2. Use designated parts only

The set's components possess important safety characteristics, such as noncombustibility and the ability to tolerate large voltages. Be sure that replacement parts possess the same safety characteristics as the originals. Also remember that the ⚠ mark, which appears in circuit diagrams and parts lists, denotes components that have particularly important safety functions; be extra sure to use only the designated components.

3. Always follow the original design when mounting parts and routing wires

The original layout includes various safety features, such as inclusion of insulating materials (tubes and tape) and the mounting of parts above the printer board. In addition, internal wiring has been routed and clamped so as to keep it away from hot or high-voltage parts. When mounting parts or routing wires, therefore, be sure to duplicate the original layout.

4. Inspect after completing service

After servicing, inspect to make sure that all screws, components, and wiring have been returned to their original condition. Also check the area around the repair location to ensure that repair work has caused no damage, and confirm safety.

5. When replacing chip components...

Never reuse components. Also remember that the negative side of tantalum capacitors is easily damaged by heat.

6. When handling flexible print boards...

• The temperature of the soldering-iron tip should be about 270C.
• Do not apply the tip more than three times to the same pattern.
• Handle patterns with care; never apply force.

Caution: Remember that hard disk drives are easily damaged by vibration. Always handle with care.

ATTENTION AU COMPOSANT AYANT RAPPORT À LA SÉCURITÉ!
LES COMPOSANTS IDENTIFÉS PAR UNE MARQUE ⚠ SUR LES DIAGRAMMES SCHÉMATIQUES ET LA LISTE DES PIÈCES SONT CRITIQUES POUR LA SÉCURITÉ DE FONCTIONNEMENT. NE REMPLACER CES COMPOSANTS QUE PAR DES PIÈSES SONY DONT LES NUMÉROS SONT DONNÉS DANS CE MANUEL OU DANS LES SUPPÉMENTS PUBLIÉS PAR SONY.

PCG-GRT99/GRT77/GRT55 (J)
PCG-GRT170/GRT150/GRT25F/GRT160 (AM)
PCG-GRT716S/GRT796HP/GRT715E/GRT795MP/GRT715M/
PCG-GRT796SP/GRT786M/GRT785B/GRT785E (EU)
PCG-GRT30P/GRT25/GRT30LP/GRT30CP/GRT25CP/GRT25L (AO)

— 2 —

TABLE OF CONTENTS

変更履歴は，"Revision History"として，
本データ末に記載してあります。

History of the changes is shown as the
"Revision History" at the end of this data.

CHAPTER 1.
SPECIFICATIONS

⚠ [COR] P4-2.66GHz

	J			AM					EU		
	PCG-GRT99/P	PCG-GRT77/B	PCG-GRT55/B	PCG-GRT170	PCG-GRT150	PCG-GRT25F	PCG-GRT160	PCG-GRT716S	PCG-GRT796HP	PCG-GRT715E	PCG-GRT795MP
CPU	P4-2.80GHz	P4-2.66GHz	M-Cel 1.80GHz	P4-2.80GHz	P4-2.80GHz	P4 2.66GHz	P4-2.66GHz	P4 2.80GHz	~~P4-2.80GHz~~	P4-2.66GHz	P4-2.66GHz
LCD	16.1UXGA (Clear Black)	16.1SXGA+ (Clear Black)	15XGA (Clear Black)	16.1SXGA+	16SXGA	15XGA	15XGA (Clear Black)	16.1SXGA+ (Clear Black)	16SXGA+	15XGA (High Brightness)	15XGA
HDD	80GB	60GB	60GB	60GB	60GB	40GB	60GB	60GB	60GB	40GB	40GB
Graphics	GeForce FX Go5600	GeForce4 420Go	GeForce4 420Go	GeForce FX Go5600	GeForce4 420Go	GeForce4 420Go	GeForce4 420 Go	GeForce FX Go5600	GeForce4 420Go	GeForce4 420Go	GeForce4 420Go
DDR MEMORY1	512MB X 1	256MB X 2	256MB X 1	256MB X 2	256MB X 2	256MB X 2	256MB X 2	256MB X 2	256MB X 2	256MB X 1	256MB X 1
QUANTITY [STANDARD/MAX]	512/1024	512/1024	256/1024	512/1024	512/1024	512/1024	512/1024	512/1024	512/1024	256/1024	256/1024
OPT-DRIVE	DVD+-RW	DVD+-RW	DVD-RW	DVD+-RW	CD-RW/ DVD-ROM	DVD-RW	DVD+-RW	DVD+-RW	CD-RW/ DVD-ROM	DVD+-RW	CD-RW/ DVD-ROM
TV tuner	○	○	○	X	X	X	X	X	X	X	X
int. Wireless LAN	X	X	X	X	○	X	○	X	~~✳~~	⊖	○
AC adaptor	PCGA-AC19V6	PCGA-AC19V6	PCGA-AC19V6	PCGA-AC19V7	PCGA-AC19V7	PCGA-AC19V7	PCGA-AC19V7	PCGA-AC19V7	PCGA-AC19V7	PCGA-AC19V7	PCGA-AC19V7
Battery	PCGA-BP2NX	PCGA-BP2NX	PCGA-BP2NX	PCGA-BP2NX	PCGA-BP2NX	PCGA-BP2NX	PCGA-BP2NX	PCGA-BP2NX	PCGA-BP2NX	PCGA-BP2NX	PCGA-BP2NX
OS	WInXP Pro	WInXP Pro	WInXP Pro	WinXP Home	WinXP Home	WinXP Home	WinXP Home	WinXP Home	WinXP Home	WinXP Home	WinXP Pro

⚠ [MA]   ⚠ [MA]   ⚠ [COR] ○   ⚠ [COR] X

	EU					AO					
	PCG-GRT715M	PCG-GRT796SP	PCG-GRT786M	PCG-GRT785B	PCG-GRT785E	PCG-GRT30P	PCG-GRT25	PCG-GRT30LP	PCG-GRT30CP	PCG-GRT25CP	PCG-GRT25L
CPU	P4-2.80GHz	P4 M2.5GHz	P4-2.66GHz	P4-2.66GHz	P4-2.66GHz	P4 2.80GHz	P4 2.40BGHz	P4-2.80GHz	P4-2.80GHz	P4-2.40BGHz	P4-2.40BGHz
LCD	15XGA (High Brightness)	16.1UXGA	16.1SXGA+ (Clear Black)	15SXGA+	15XGA (High Brightness)	16.1UXGA	15XGA	16.1UXGA	16.1UXGA	15XGA	15XGA
HDD	40GB	80GB	40GB	60GB	40GB	60GB	40GB	60GB	60GB	40GB	40GB
Graphics	GeForce FX Go5600	GeForce FX Go5600	GeForce FX Go5600	GeForce4 420Go	GeForce FX Go5600	GeForce FX Go5600	GeForce4 420Go	GeForce FX Go5600	GeForce FX Go5600	GeForce4 420Go	GeForce4 420Go
DDR MEMORY1	256MB X 2	512MB X 2	256MB X 2	256MB X 2	256MB X 2	512MB X 1	256MB X 1	512MB X 1	512MB X 1	256MB X 1	256MB X 1
QUANTITY [STANDARD/MAX]	512/1024	1024/1024	512/1024	512/1024	512/1024	512/1024	256/1024	512/1024	512/1024	256/1024	256/1024
OPT-DRIVE	DVD+-RW	DVD+-RW	~~DVD-RW~~	CD-RW/ DVD-ROM	DVD+-RW	DVD+-RW	DVD-RW	DVD+-RW	DVD+-RW	DVD-RW	DVD-RW
TV tuner	X	X	X	X	X	X	X	X	X	X	X
int. Wireless LAN	X	○	X	X	X	○	X	○	○	X	X
AC adaptor	PCGA-AC19V7	PCGA-AC19V7	PCGA-AC19V7	PCGA-AC19V7	PCGA-AC19V7	PCGA-AC19V7	PCGA-AC19V7	PCGA-AC19V7	PCGA-AC19V7	PCGA-AC19V7	PCGA-AC19V7
Battery	PCGA-BP2NX	PCGA-BP2NX	PCGA-BP2NX	PCGA-BP2NX	PCGA-BP2NX	PCGA-BP2NX	PCGA-BP2NX	PCGA-BP2NX	PCGA-BP2NX	PCGA-BP2NX	PCGA-BP2NX
OS	WinXP Pro	WinXP Pro	WinXP Home	WinXP Home	WinXP Home	WinXPPro	WinXP Home	WinXP Pro	WinXP Home	WinXP Home	WinXP Home

⚠ [MA]

⚠ [COR] DVD+ -RW   ⚠ [MA]   ⚠ [MA]   ⚠ [MA]   ⚠ [MA]   ⚠ [MA]

- 本表中の商標・登録商標については，2ページをご参照ください。
- The trademarks or registered trademarks of above table, refer to page 2.

Confidential

Port replicator

CNX-216

CNX-218

RGB

SVIDEO OUT

LINE&VIDEO OUT

AMP

LINE IN

AMP

Audio Power

USB2.0 HUB
NEC_UPD720110
AGC-8EA

USB1

USB2

DC IN

SPDIF

PS/2

Serial

Parallel

RJ-45

MM

Docking CN
to Main Unit

RGB

S-VIDEO Out

Video Out

Line Out

Line In

USB1

USB2

SPD IF

PS/2

Serial

Parallel

Ether

RGB

LCD

AV OUT

Gfx
NV31/SQ17

66MHz 1/2/4/8x   AGP

VIF-28/31
VIF-28: for NV31
VIF-31: for SQ17

to HDD

PriIDE

PriIDE

2ndIDE

Multi Purpoase Bay

to Opt

USB2.0

Port0   USB0
Port1   USB3
Port2   USB4

HC0

HC1

HC2

MS

IFX-257

USB5

AC Link

MDC Hdr
Smart MC 3G

AC'97
SigmaTel
STAC9750

MIC

HP

CPU Socket
478uFCPGA

FSB 100MHz/133MHzx4

SiS 648

DDR
333MHz

DDR
SODIM M1   SODIM M2

AAh   A8h

ROMINFO
M24C02

AEh

CLK
GENERATOR
ICS952003

D2 or D3h

CLK
BUFFER
ICS93722

D2h

MuTIOL
1G

SMBUS2

2ndIDE

PCI   33MHz, 32b

SiS963

mini
PCI Slot

W-LAN

LAN(PHY)
RTL8201BL

Ether

to Port
Replicator

MM

RJ-45   RJ-11
(Ether) (MODEM)

RICOH
CardBus&i.LINK
R5C554

i.LINK

Card Bus

CardBus

ENX-23
Tuner
Board

SVIDEO
IN

AV IN

RF IN

Choose Card Bus or
Tuner which one

LPC   33MHz

HITACHI
KBC
H8S/2160B
144P TQFP

BIOS ROM
4Mb
32P TSOP
SST49LF040

SmSC
SIO
LPC47N227
100P TQFP

Debug

SMBUS1

SMBUS0

98h   92h

LM86   LM75

16h

Batt1

16h

Batt2

Multi Purpoase Bay

FAN

CPU FAN

to Port
Replicator

TP

Int Keyboard

PS/2

Serial

Parallel

Parallel

to Port
Replicator

to Port
Replicator

to Port
Replicator

Rear Panel

Wireless LAN Model

ANTENNA ANTENNA

LCD

LCD Block

INVERTER

EXTERNAL MICROPHONE
HEADPHONE

USB PHONE   USB USB   PRINTER   DC-IN   AV OUT   MONITOR

NETWORK

SPEAKER

CN6001

CN6002

**SWX-137 Board
(Side-A)**

NICKEL HYDROGEN
BATTERY

CN1501

CN1902 CN1901 CN1402

CN1802

CN1803

CN2301

CN1801

CN3001

CN1403

CN1404

CN1401

CN2101

CN3101

CN3701   CN3703

**VIF-28/31 Board
(Side-A)**

CN3702

IEEE 1394
i.LINK

CN1701

CARD, MODEM

J2   J1

CN801

CN3501

PC CARD
CONNECTOR

DC FAN

CN301

CN3000

CN4101

MEMORY
STICK

CN4602

CN3301

CN1502

CN3201 CN3002

CN701

CN2402

HARD DISK

**PWS-27 Board
(Side-A)**

CN4601

CN303

**IFX-257 Board
(Side-A)**

CN702

CN2401

CN302

CN4100

CN303

CN2302

CN2201

DC FAN

CN4401

S VIDEO

CN600

**ENX-230 Board
(Side-A)**

Optical DRIVE

**CNX-215 Board
(Side-A)**

CN3003

KEY BOARD

2nd BATTERY
PACK

VIDEO
OUT

CN601

VIDEO
IN

CN500

CN400

PAD, TOUCH

CN8001

**SWX Board
(Side-A)**

CN4400

BATTERY PACK

TV Tune Model

Side

RAM

DDR SO-DIMM

**CARD,
WIRELESS LAN**

Wireless LAN Model

CN1

**LEX-47 Board
(Side-A)**

From board to connector (direct connection)

Harness (connector at both end)

Harness (soldered at one end)

Connectors soldered on board and appearing on the panel

CHAPTER 4.
EXPLODED VIEWS AND PARTS LIST

- The parts list is compiled by blocks of a palmrest and bottom etc. The sections of the parts list are different depending on the model. Please refer to list of contents shown in the below.

- 分解図と部品表は，パームレスト，ボトムなどのブロックごとに分かれています。機種によって部品表のセクションが異なりますので，詳細は右下の一覧表を参照してください。

NOTE:
- Items marked " * " are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.
- The mechanical parts with no reference number in the exploded views are not supplied.
- When two or more parts are shown, use the part described first as the main part.
- The parts marked " $ " are the High Value Modules (HVM).
- The parts marked " # " are the parts on which barcode label is attached.
  For the barcode label, refer to CHAPTER 5.
- The parts marked " & " are the "Customer Replaceable Parts (CRP)" that can be replaced by Field Customer Support.
  Especially the parts with the <&> mark require the special attention to use them. Here fore, check first whether the desired part is one of the targetted parts of the Customer Replaceable Parts(CRP), or the non-targetted parts by referring to the exploded view.
- The indication [CH] is used for identification of part type.
- Regarding the boards of this model, the discrete parts on the boards cannot be replaced. However, Some connectors can be replaced.
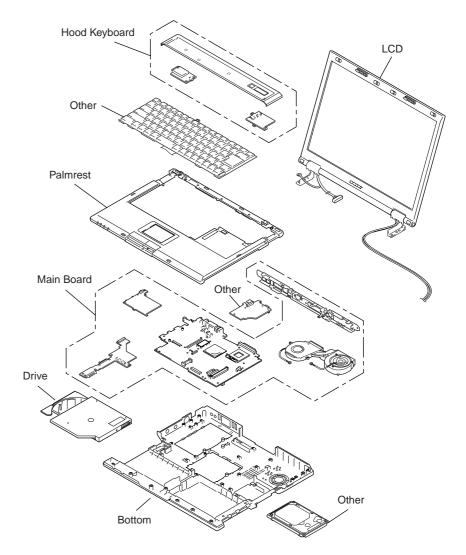
The components identified by mark ⚠ or dotted line with mark ⚠ are critical for safety. Replace only with part number specified.

Les composants identifiés par une marque ⚠ sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.

【使用上の注意】
- ＊ 印の部品は常備在庫しておりません。
- 図面番号のない部品は供給しません。
- 併記部品の場合，上部記載部品をメイン部品として使用してください。
- 部品名称の前に＄印のついた部品は，High Value Module (HVM)です。
- 商品名称の前に＃印のついた部品は，バーコードラベル貼付部品です。
  バーコードラベルについてはCHAPTER 5を参照してください。
- 部品名称の前に＆印のついた部品は，お客様窓口などでも交換可能な Customer Replacable Parts (CRP)です。
  特に<&>印のついた部品は，使い分けが必要な部品ですので，分解図で Customer Replacable Parts 対象部品か，対象外部品かを必ず御確認ください。
- [CH]の表記は部品管理上の識別です。
- 本モデルの基板については，基板上の各部品の修理は行うことができません。ただし，一部のコネクタについては，修理可能です。

⚠印の部品，または⚠印付きの点線で囲まれた部品は，安全性を維持するために重要な部品です。従って交換時は，必ず指定の部品を使用してください。

|		Drive	LCD	Palmrest	Bottom	Main Board	Hood Keyboard	Other	Accessory
J	GRT99/P	D-1	L-2	P-1	B-1	M-1	H-1	O-1	A-1
	GRT77/B	D-1	L-2	P-1	B-1	M-1	H-1	O-1	A-1
	GRT55/B	D-1	L-4	P-2	B-2	M-1	H-1	O-1	A-1
	J-CTO	D-1	L-2,3,4,5	P-1,2	B-1,2	M-1	H-1	O-1	A-1
AM	GRT170	D-1	L-3	P-1	B-1	M-1	H-1	O-1	A-1
	GRT150	D-1	L-1	P-1	B-1	M-1	H-1	O-1	A-1
	U-CTO	D-1	L-1,2,3,4,5,6	P-1,2	B-1,2	M-1	H-1	O-1	A-1
	GRT25F	D-1	L-5	P-2	B-2	M-1	H-1	O-1	A-1
	GRT160G	D-1	L-4	P-2	B-2	M-1	H-1	O-1	A-1
EU	GRT716S	D-1	L-2	P-1	B-1	M-1	H-1	O-1	A-1
	GRT796HP	D-1	L-3	P-1	B-1	M-1	H-1	O-1	A-1
	GRT715E	D-1	L-5	P-2	B-2	M-1	H-1	O-1	A-1
	GRT795MP	D-1	L-5	P-2	B-2	M-1	H-1	O-1	A-1
	GRT715M	D-1	L-5	P-2	B-2	M-1	H-1	O-1	A-1
	GRT796SP	D-1	L-3	P-1	B-1	M-1	H-1	O-1	A-1
	GRT786M	D-1	L-2	P-1	B-1	M-1	H-1	O-1	A-1
	GRT785B	D-1	L-5	P-2	B-2	M-1	H-1	O-1	A-1
	GRT785E	D-1	L-5	P-2	B-2	M-1	H-1	O-1	A-1
AO	GRT30P	D-1	L-3	P-1	B-1	M-1	H-1	O-1	A-1
	GRT25	D-1	L-5	P-2	B-2	M-1	H-1	O-1	A-1
	GRT30LP	D-1	L-3	P-1	B-1	M-1	H-1	O-1	A-1
	GRT30CP	D-1	L-3	P-1	B-1	M-1	H-1	O-1	A-1
	GRT25CP	D-1	L-5	P-2	B-2	M-1	H-1	O-1	A-1
	GRT25L	D-1	L-5	P-2	B-2	M-1	H-1	O-1	A-1
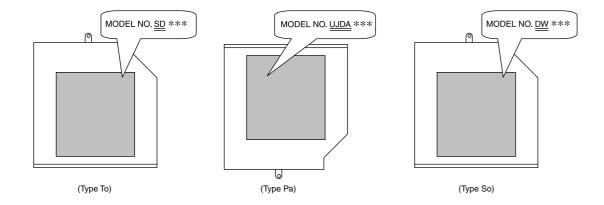
⚠ **[MA]**

Confidential
PCG-GRT99/GRT77/GRT55 (J)
PCG-GRT170/GRT150/GRT25F/GRT160 (AM)
PCG-GRT716S/GRT796HP/GRT715E/GRT795MP/GRT715M/
PCG-GRT796SP/GRT786M/GRT785B/GRT785E (EU)
PCG-GRT30P/GRT25/GRT30LP/GRT30CP/GRT25CP/GRT25L (AO)
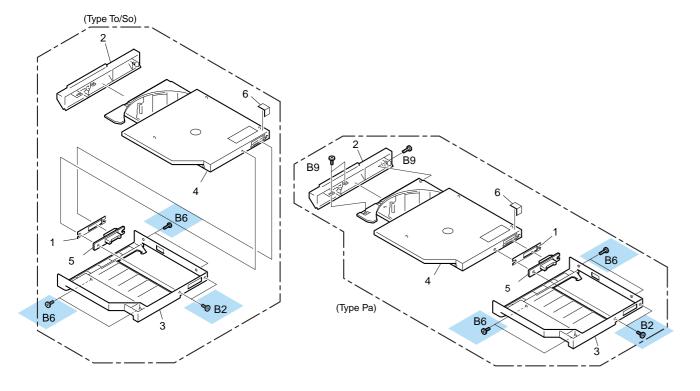
How to Use Parts Differently.

This series of product uses the three different types of optical drive (To type, Pa type and So type).
When replacing the optical drive, use the To type parts for the To type optical drive, and use
the Pa type parts for the Pa type optical drive, and use the So type parts for the So type optical drive.
Replace the peripheral parts of optical drive with the same type in the same way.

[How to identify the To, Pa and So types of parts]

MODEL NO. SD ∗∗∗   MODEL NO. UJDA ∗∗∗   MODEL NO. DW ∗∗∗

(Type To)   (Type Pa)   (Type So)

D-1. Optical Drive

(Type To/So)

(Type Pa)

Ref.No.	Part No.		Description
1	4-654-837-01		SHEET BAY BOARD
3	X-4625-949-1		ASSY BAY CASE
5	A-8067-975-A	$	COMPLETE PWB CNX-215
6	4-677-675-01		ODD CU FOIL
B2	4-669-867-01	&	SCREW (M2X4), SPECIAL HEAD
B6	4-656-703-01	&	SCREW M2
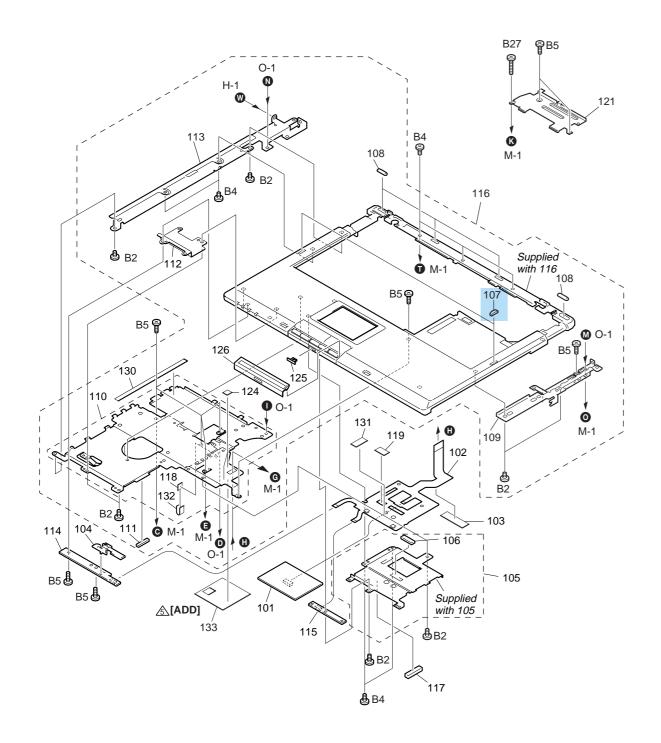
			J								AM				EU						AO					
Ref.No.	Part No.		GRT99/P	GRT77/B	GRT55/B	GRT70 *	GRT50 *	GRT170	GRT150	GRT100 *	GRT25F	GRT160	GRT716S	GRT796HP	GRT715E	GRT795MP	GRT715M	GRT796SP	GRT786M	GRT785B	GRT785E	GRT30P	GRT25	GRT30LP	GRT30CP	GRT25CP	GRT25L
2	X-4625-936-1		ASSY SO DVD+-RW BEZEL	●	●		●	●	●		●		●	●	●	●		●	●	●		●			●	●	●
	X-4625-922-1		DVDRW BEZEL(To)			●					●	●									●			●	●		
	X-4625-937-1		ASSY KME DVD-RW BEZEL(Pa)			●					●	●									●			●	●		
	X-4625-920-1		ASSY KME COMBO BEZEL(Pa)							●			●		●		●		●			●					●	●
4	8-457-509-00	$ #	DVD DRIVE, DW-U50A-VN(So)	●	●		●	●	●		●		●	●	●	●		●	●	●		●			●	●	●
	1-796-506-11	$ #	W-DVD(SD-R6012)(To)			●					●	●									●			●	●		
	1-796-480-11	$ #	W-DVD(UJ-810B)(Pa)			●					●	●									●			●	●		
	1-796-594-11	$ #	COMBO DRIVE (UJDA740)(Pa)							●	●	●	●		●		●		●	●			●				●	●
B9	4-645-177-01		SCREW (M1.7X3.5)(Pa)			●					●	●	●	●		●		●			●	●			●	●	●	●

⚠ [MA]   ⚠ [MA]   ⚠ [MA]   ⚠ [MA]

⚠ [MA]   ⚠ [MA]

⚠ [MA]   ⚠ [MA]

- This parts list contains two different types of parts.
  The first type is the parts that are common to all models.
  The other type is the parts that are different depending on each model.
- The model that is accompanied by asterisk (∗) is the CTO model.

・この部品表は，機種共通の部品と，機種によって使い分けが必要な部品に分かれています。
・機種名に (∗) がつくのは CTO モデルです。

PCG-GRT99/GRT77/GRT55 (J)
PCG-GRT170/GRT150/GRT25F/GRT160 (AM)
PCG-GRT716S/GRT796HP/GRT715E/GRT795MP/GRT715M/
PCG-GRT796SP/GRT786M/GRT785B/GRT785E (EU)
PCG-GRT30P/GRT25/GRT30LP/GRT30CP/GRT25CP/GRT25L (AO)
4-3   4-4

Palmrest

P-1. Palmrest (16-inch Model)
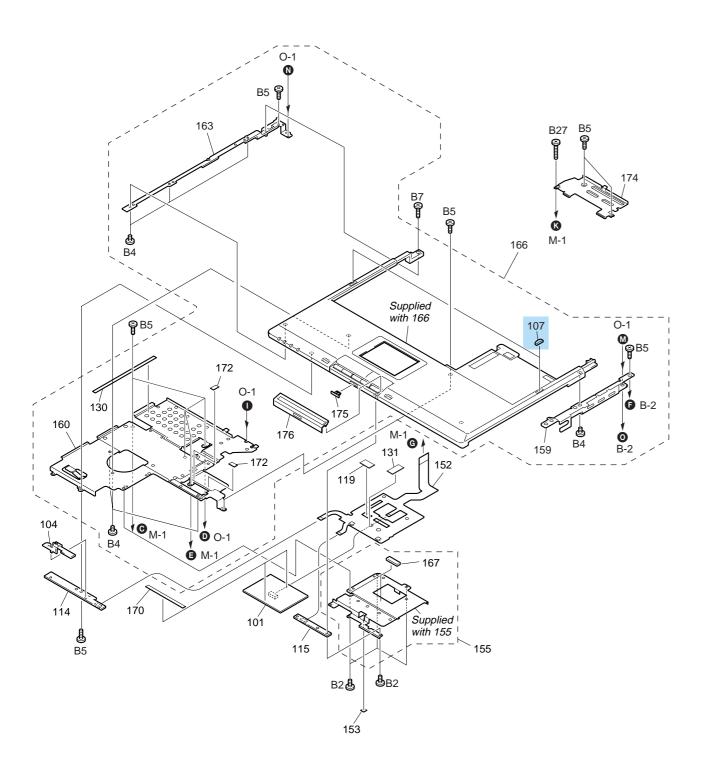
Ref.No.	Part No.	Description		
101	1-796-319-41	PAD, TOUCH		
102	9-885-033-60	PWB (H), FLEXIBLE PRINT		
103	4-676-871-01	ADHESIVE TP FPC		
104	X-4625-918-1	ASSY LATCH DETECTOR		
* 105	X-4625-912-1	ASSY TP BRACKET		
106	4-676-956-01	GASKET T/P CONTACT		
107	4-668-288-11	&	CUSHION PALM	
108	4-676-948-01	RUBBER STOPPER		
109	4-673-743-01	PALMREST BRACKET R		
110	X-4625-910-1	ASSY PALMREST SHIELDING L		
111	4-676-951-01	GASKET SHIELDING CONTACT		
112	4-676-950-01	LEX BOARD PLATE		
* 113	X-4626-178-1	ASSY PALMREST BRACKET L		
114	A-8067-971-A	$	COMPLETE PWB LEX-47	
115	A-8067-972-A	$	COMPLETE PWB SWX-142	
117	4-677-786-01	GASKET CHARGER BOARD		
118	4-677-944-01	GASKET CD-ROM BRACKET		
119	4-676-954-01	ADHESIVE TP		
* 121	X-4625-911-1	ASSY PALMREST SHIELDING R		
124	4-677-945-01	SPACER BKT M		
130	4-671-203-01	SHEET SHIELDING PALMREST		
131	4-676-955-01	MYLAR TP		
132	4-678-040-01	COPPER TAPE CD-ROM BKT		
133	4-679-890-01	TP CO-FOIL	⚠ [ADD]	
B2	4-669-867-01	SCREW (M2X4), SPECIAL HEAD		
B4	4-641-726-81	SCREW (M2), SPECIAL HEAD		
B5	4-641-726-41	SCREW (M2), SPECIAL HEAD		
B27	4-678-226-01	M2-SCREW		

			J			AM			EU				AO		
Ref.No.	Part No.	Description	GRT99/P	GRT77/B	GRT770 *	GRT170	GRT150	GRT100 *	GRT716S	GRT796HP	GRT796SP	GRT786M	GRT30P	GRT30LP	GRT30CP
116	X-4625-906-1	ASSY PALMREST HOUSING			●	●	●	●	●	●	●	●	●	●	●
	X-4626-046-1	ASSY PALMREST HOUSING(TV)	●	●	●			●							
125	4-673-722-01	SLIDE WIRELESS KNOB			●	●				●	●		●	●	●
126	4-673-719-01	ESCUSHION W/O WIRELESS(TV)(16)	●	●	●			●							
	X-4625-908-1	ASSY ESCUSHION(TV)(16)						●							
	4-673-719-11	ESCUSHION W/O WIRELESS(16)					●		●	●		●			
	X-4626-219-1	ASSY ESCUSHION(16)				●		●		●	●		●	●	●

- This parts list contains two different types of parts.
  The first type is the parts that are common to all models.
  The other type is the parts that are different depending on each model.
- The model that is accompanied by asterisk (∗) is the CTO model.

・ この部品表は，機種共通の部品と，機種によって使い分けが必要な部品に分かれています。
・ 機種名に (∗) がつくのは CTO モデルです。

⚠ [MA]   ⚠ [MA]   ⚠ [MA]   ⚠ [MA]

PCG-GRT99/GRT77/GRT55 (J)
PCG-GRT170/GRT150/GRT25F/GRT160 (AM)
PCG-GRT716S/GRT796HP/GRT715E/GRT795MP/GRT715M/
PCG-GRT796SP/GRT786M/GRT785B/GRT785E (EU)
PCG-GRT30P/GRT25/GRT30LP/GRT30CP/GRT25CP/GRT25L (AO)

4-5   4-6

P-2. Palmrest (14-inch, 15-inch Model)
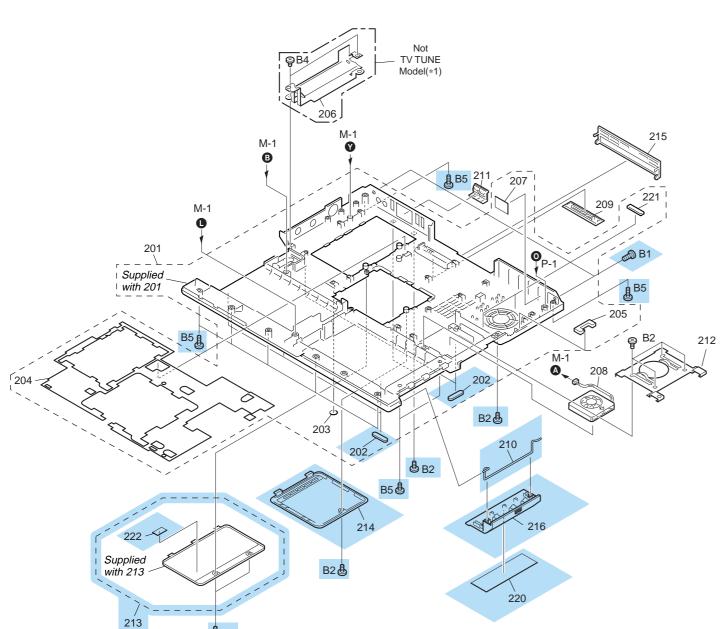
⚠ [COR]

Ref.No.	Part No.		Description
101	1-796-319-41		PAD, TOUCH
104	X-4625-918-1		ASSY LATCH DETECTOR
107	4-668-288-11	&	CUSHION PALM
114	A-8067-971-A	$	COMPLETE PWB LEX-47
115	A-8067-972-A	$	COMPLETE PWB SWX-142
119	4-676-954-01		ADHESIVE TP
130	4-671-203-01		SHEET SHIELDING PALMREST
131	4-676-955-01		MYLAR TP
152	9-885-033-61		PWB (M), FLEXIBLE PRINT
153	4-673-995-01		T/P-PW BD GASKET
155	4-673-798-01		TP BRACKET
159	4-673-797-01		BRACKET PALMREST R
160	X-4625-928-1		PALMREST SHIELDING L ASSY
163	4-673-796-01		BRACKET PALMREST L
167	4-673-994-01		T/P GASKET
170	4-677-676-01		TOUCH PAD ADHESIVE
172	4-677-673-01		SPACER BKT MYLAR
174	X-4625-929-1		PALMREST SHIELDING R ASSY
B2	4-669-867-01		SCREW (M2X4), SPECIAL HEAD
B4	4-641-726-81		SCREW (M2), SPECIAL HEAD
B5	4-641-726-41		SCREW (M2), SPECIAL HEAD
B7	4-677-186-01		SCREW M2X10L (K) B-ZY, NY
B27	4-678-226-01		M2-SCREW

			J		AM			EU					AO		
			GRT55/B	GRT750 *	GRT100 *	GRT25F	GRT160	GRT715E	GRT795MP	GRT715M	GRT785B	GRT785E	GRT25	GRT25CP	GRT25L
Ref.No.	Part No.	Description													
166	X-4625-914-1	ASSY PALMREST HOUSING			●	●	●	●	●	●	●	●	●	●	●
	X-4625-945-1	ASSY PALMREST HOU (T)	●	●											
175	4-673-683-01	SLIDE WIRELESS KNOB			●		●		●						
176	4-673-701-01	ESCUSHION W/O WIRELESS (TV)(15)	●	●	●										
	X-4625-923-1	ASSY ESCUSHION(TV)(15)			●										
	4-673-701-11	ESCUSHION W/O WIRELESS(15)			●	●	●		●		●	●	●	●	●
	X-4625-225-1	ASSY ESCUSHION(15)					●		●						

⚠ [COR] X-4626-225-1

⚠ [MA]

⚠ [MA]

⚠ [MA]

- This parts list contains two different types of parts.
  The first type is the parts that are common to all models.
  The other type is the parts that are different depending on each model.
- The model that is accompanied by asterisk (∗) is the CTO model.

・この部品表は，機種共通の部品と，機種によって使い分けが必要な部品に分かれています。
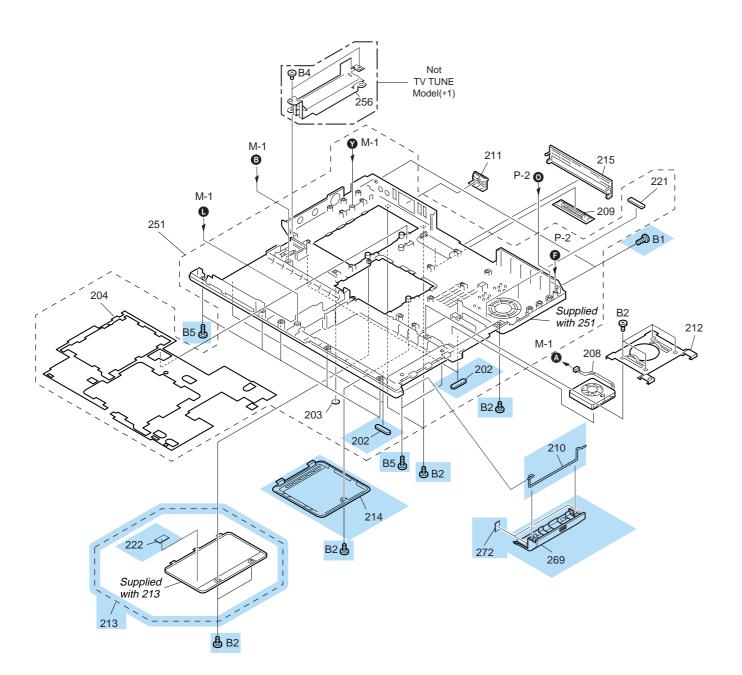・機種名に (∗) がつくのは CTO モデルです。

Bottom

B-1. Bottom (16-inch Model)

Ref.No.	Part No.		Description
202	4-668-294-11	&	FOOT FRONT
203	4-654-380-41		CAP BAY
204	4-673-888-01		SHIELDING MYLAR
205	4-676-947-01		FERRITE CORE SPONGE
207	4-676-946-01		MYLAR BOTTOM OUTLET
208	A-8115-838-A		ASSY 3RD FAN
209	4-654-379-21		COVER (PORT)
210	4-668-299-01	&	DOOR BATTERY SPRING
211	4-673-986-01		CAP ETHERNET
* 212	X-4625-933-1		3RD FAN SHIELDING ASSY
213	X-4625-934-1	&	DOOR MDC ASSY
214	X-4625-917-1	&	ASSY DOOR DIMM
215	X-4625-919-1	&	ASSY DOOR IO
216	4-673-714-01	&	DOOR BATTERY
220	4-676-850-01	&	LABEL BATTERY DOOR
221	4-676-461-01		LAN GASKET
222	4-677-682-01	&	WIRELESS LAN GASKET
			⚠ [COR] -21
B1	4-654-811-04	&	SCREW M3
B2	4-669-867-01	&	SCREW (M2X4), SPECIAL HEAD
B4	4-641-726-81	&	SCREW (M2), SPECIAL HEAD
B5	4-641-726-41	&	SCREW (M2), SPECIAL HEAD

				J			AM			EU				AO		
Ref.No.	Part No.		Description	GRT99/P	GRT77/B	GRT770 *	GRT170	GRT150	GRT100 *	GRT716S	GRT796HP	GRT796SP	GRT786M	GRT30P	GRT30LP	GRT30CP
201	X-4625-988-1		ASSY HOUSING BOTTOM (T)(16)	●	●	●			●							
	X-4625-905-1		ASSY HOUSING BOTTOM(16)				●	●	●	●	●	●	●	●	●	●
206	4-673-748-01		BRACKET IO LEFT			●	●	●	●	●	●	●	●	●	●	●

- This parts list contains two different types of parts.
  The first type is the parts that are common to all models.
  The other type is the parts that are different depending on each model.
- The model that is accompanied by asterisk (✻) is the CTO model.

・この部品表は，機種共通の部品と，機種によって使い分けが必要な部品に分かれています。
・機種名に (✻) がつくのは CTO モデルです。

✻1 For the BRACKET IO LEFT of the Tuner model, refer to the Main Board.
✻1 TVチューナーモデルのBRACKET IO LEFTは，Main Boardを参照ください。

⚠ [MA]

PCG-GRT99/GRT77/GRT55 (J)
PCG-GRT170/GRT150/GRT25F/GRT160 (AM)
PCG-GRT716S/GRT796HP/GRT715E/GRT795MP/GRT715M/
PCG-GRT796SP/GRT786M/GRT785B/GRT785E (EU)
PCG-GRT30P/GRT25/GRT30LP/GRT30CP/GRT25CP/GRT25L (AO)

4-9   4-10

⚠ [COR]
B-2. Bottom (14-inch, 15-inch Model)
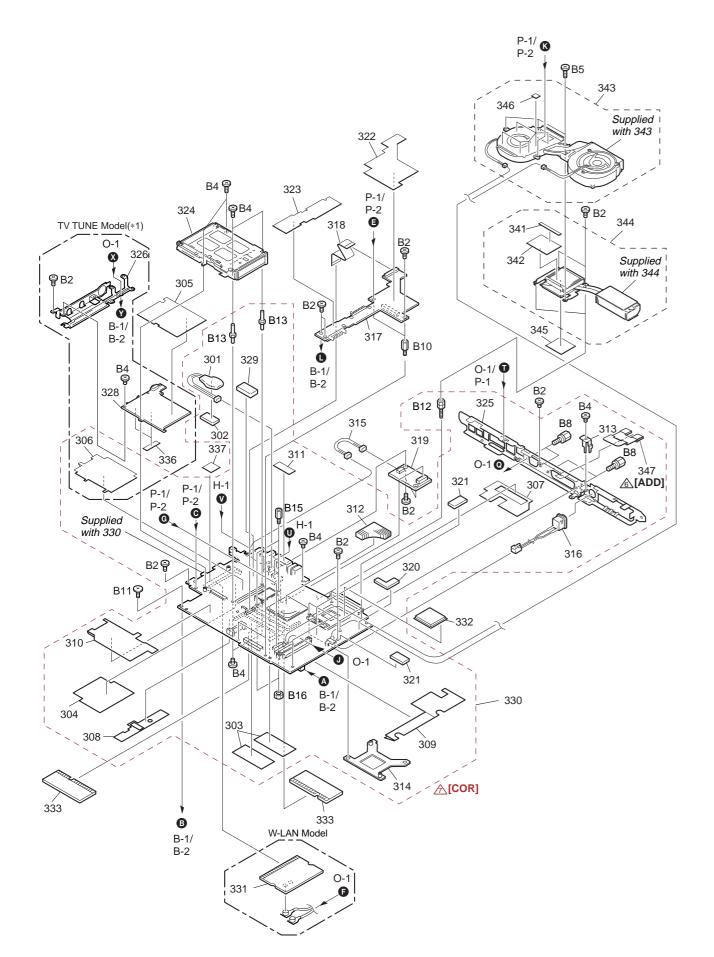
Ref.No.	Part No.		Description
202	4-668-294-11	&	FOOT FRONT
203	4-654-380-41		CAP BAY
204	4-673-888-01		SHIELDING MYLAR
208	A-8115-838-A		ASSY 3RD FAN
209	4-654-379-21		COVER (PORT)
210	4-668-299-01	&	DOOR BATTERY SPRING
211	4-673-986-01		CAP ETHERNET
* 212	X-4625-933-1		3RD FAN SHIELDING ASSY
213	X-4625-934-1	&	DOOR MDC ASSY
214	X-4625-917-1	&	ASSY DOOR DIMM
215	X-4625-919-1		ASSY DOOR IO
221	4-676-461-01		LAN GASKET
222	4-677-682-01	&	WIRELESS LAN GASKET
269	~~4-673-714-01~~	&	DOOR BATTERY
272	4-677-681-01	&	SPONGE DOOR BATTERY ⚠ [COR] X-4626-243-1
B1	4-654-811-01	&	SCREW M3
B2	4-669-867-01	&	SCREW (M2X4), SPECIAL HEAD
B4	4-641-726-81	&	SCREW (M2), SPECIAL HEAD
B5	4-641-726-41	&	SCREW (M2), SPECIAL HEAD

			J		AM			EU					AO		
			GRT55/B	GRT750 *	GRT100 *	GRT25F	GRT160	GRT715E	GRT795MP	GRT715M	GRT785B	GRT785E	GRT25	GRT25CP	GRT25L
Ref.No.	Part No.	Description													
251	X-4625-924-1	ASSY HOUSING BOTTOM (T)(15)	●	●	●										
	X-4625-913-1	ASSY HOUSING BOTTOM(15)				●	●	●	●	●	●	●	●	●	●
256	4-673-804-01	BRACKET IO LEFT		●	●	●	●	●	●	●	●	●	●	●	●

⚠ [MA] ⚠ [MA] ⚠ [MA]

- This parts list contains two different types of parts.
  The first type is the parts that are common to all models.
  The other type is the parts that are different depending on each model.
- The model that is accompanied by asterisk (∗) is the CTO model.

・この部品表は，機種共通の部品と，機種によって使い分けが必要な部品に分かれています。
・機種名に (∗) がつくのは CTO モデルです。

∗1 For the BRACKET IO LEFT of the Tuner model, refer to the Main Board.

∗1 TVチューナーモデルのBRACKET IO LEFTは，Main Boardを参照ください。

M-1. Main Board

Ref.No.	Part No.	Description
301	9-885-033-67	BATTERY, LITHIUM STORAGE
302	4-642-711-11	SHEET (BATTERY), ADHESIVE
303	4-668-307-01	SHEET DIMM
304	4-668-308-01	SHEET MINI PCI
306	4-673-997-01	SHEET PC CARD
307	4-673-999-01	SHEET PORT
308	4-674-000-01	SHEET DIMM SIDE
309	4-674-001-01	SHEET HDD
310	4-676-421-01	SHEET DRIVE
311	4-676-461-01	LAN GASKET 20X5X5X
* 312	4-673-982-01	NORTH BRIDGE HEATSINK
* 313	4-673-811-01	DC IN HOLDER
* 314	X-4625-932-1	CPU BACK PLATE ASSY
315	9-885-033-65	HARNESS (2P)
316	9-885-033-63	DC, HARNESS
317	A-8067-969-A $	COMPLETE PWB PWS-27
318	9-885-033-72	CABLE (30P), FLEXIBLE FLAT
319	1-761-606-13 $ #	CARD, MODEM
320	4-674-004-01	CMOS PAD U
321	4-674-005-01	CMOS PAD L

Ref.No.	Part No.	Description
322	4-674-007-01	SHEET PWS 1
323	4-674-008-01	SHEET PWS 2
329	4-677-674-01	SPONGE CRYSTAL
336	4-677-894-01	BUSTERAID TUNER
337	4-677-893-01	BUSTERAID MBX
341	4-677-183-01	FIN GASKET
342	4-677-668-01	FIN MYLAR
343	A-8115-390-A $	ASSY FAN UNIT
345	4-671-241-01	SHEET THERMAL (STH)
346	4-677-182-01	FAN PLATE MYLAR
347	4-676-505-01	SPRING M BKT IO ← ⚠ [ADD]
B2	4-669-867-01	SCREW (M2X4), SPECIAL HEAD
B4	4-641-726-81	SCREW (M2), SPECIAL HEAD
B5	4-676-501-01	SCREW M2X6L,(K)B-NI,NY
B8	4-635-966-01	SCREW (HEX)
B10	4-654-386-01	SPACER (PWS)
B11	4-654-387-01	SCREW (MBX)
B12	4-676-485-01	SPACER(CPU)
B13	4-677-686-01	SPACER (PWS) H=8.0
B15	4-654-385-01	SPACER (VIF)
B16	7-622-205-05	NUT (M2 TYPE2), HEXAGON

Ref.No.	Part No.	Description	GRT99/P	GRT77/B	GRT55/B	GRT770 *	GRT750 *	GRT170	GRT150	GRT100 *	GRT25F	GRT160	GRT716S	GRT796HP	GRT715E	GRT795MP	GRT715M	GRT796SP	GRT786M	GRT785B	GRT785E	GRT30P	GRT25	GRT30LP	GRT30CP	GRT25CP	GRT25L
				J					AM					EU									AO			
305	4-674-003-01	TUNER BD MYLAR	●	●	●	●	●	●		●																	
324	9-885-033-66	CONNECTOR PC CARD (1 SLOT)	●	●	●			●		●																	
	9-885-033-62	CONNECTOR PC CARD (2 SLOT)				●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
* 325	X-4626-179-1	ASSY BRACKET IO(16)	●	●	●	●	●	●		●																	
	X-4625-954-1	ASSY BRACKET I/O(15)				●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
* 326	X-4625-909-1	ASSY BRACKET IO LEFT (T)(16)	●	●	●	●	●	●		●																	
	X-4625-935-1	ASSY BRACKET IO LEFT (T) (15)				●	●	●	●	●																	
328	A-8067-973-A	COMPLETE PWB ENX-23(J)	●	●	●	●	●	●		●																	
	A-8067-974-A	COMPLETE PWB ENX-23(U)				●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
330	A-8115-749-A $ #	COMPL MBX-86(T)(16)(S)	●	●	●		●	●		●																	
	A-8115-748-A $ #	COMPL MBX-86(16)(S)				●		●	●	●	●			●	●			●				●			●		●
	A-8115-747-A $ #	COMPL MBX-86(T)(15)(S)			●		●	●		●																	
	A-8115-746-A $ #	COMPL MBX-86(15)(S)				●		●	●	●	●			●	●			●			●			●			●
331	1-761-648-32 $ #	CARD, WIRELESS LAN (FCC)				●		●	●	●	●			●	●			●			●			●	●	●	●
332	6-704-133-01	IC RK80532PE072512SL6S4(P4 2.8)	●			●	●	●		●																	
	6-704-132-01	IC RK80532PE06751SL6S3(P4 2.66)		●				●		●			●	●	●			●				●			●		●
	6-704-128-01	IC RK80532PE056512SL6RZ(P4 2.4)				●	●	●		●												●			●		●
	6-703-333-01	IC RH80532GC041512-2(P4-M 2.0)						●		●																	
	6-703-826-01	IC RH80532NC033256(C 1.8)		●				●		●																	
	6-703-846-01	IC RH80532GC049512(P4-M 2.2)						●		●																	
	6-704-320-01	IC RH80532GC060512(P4-M 2.5)						●		●											●X2						
333	6-704-105-01	IC HYS64D64020GBDL-7-B(DDR 512MB)	●				●			●								●									
333	6-704-094-01	IC MT8VDDT3264HDG-265C3(DDR 256MB)		●X2	●		●	●X2	●X2		●X2	●X2	●X2	●X2		●X2			●X2	●X2	●X2	●X2					
344	4-673-983-01 $	FIN MODULE STH	●	●		●	●	●	●	●																	
	4-673-984-01 $	FIN MODULE MOBILE			●			●		●																	

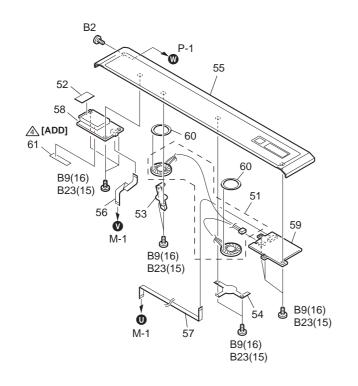⚠ [MA]   ⚠ [MA]   ⚠ [MA]   ⚠ [MA]

⚠ [MA]   ⚠ [MA]

⚠ [MA]   ⚠ [MA]

- This parts list contains two different types of parts.
  The first type is the parts that are common to all models.
  The other type is the parts that are different depending on each model.
- The model that is accompanied by asterisk (∗) is the CTO model.

・この部品表は，機種共通の部品と，機種によって使い分けが必要な部品に分かれています。
・機種名に (∗) がつくのは CTO モデルです。

∗1 For the BRACKET IO LEFT of the model without Tuner, refer to the Bottom.
∗1 TVチューナーのないモデルのBRACKET IO LEFTは，Bottomを参照ください。

H-1. Hood Keyboard
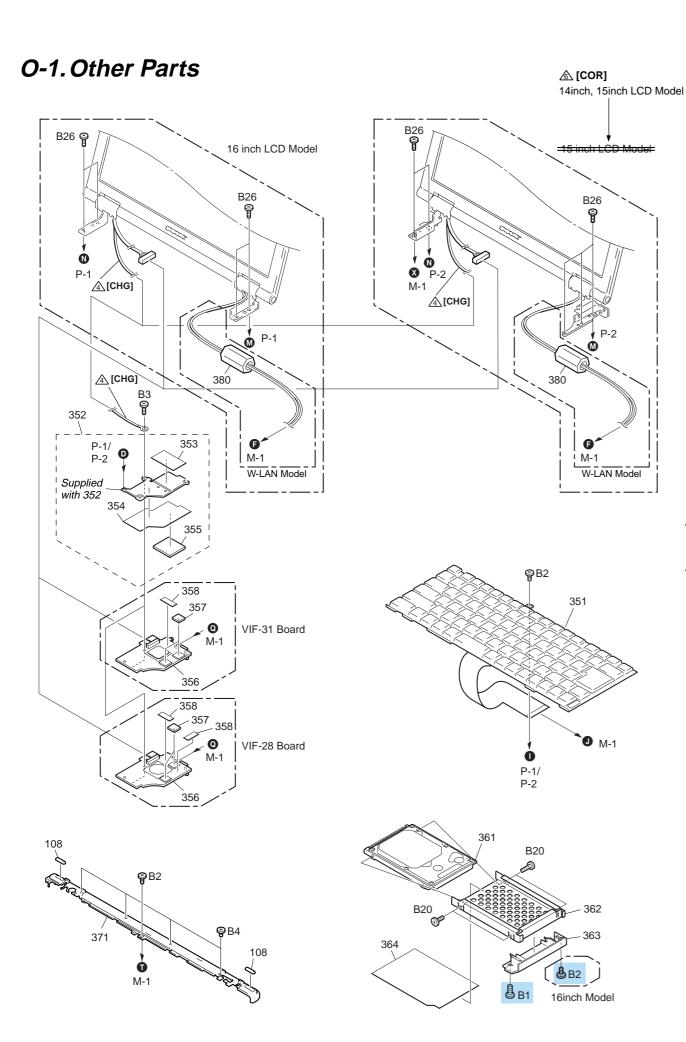
Ref.No.	Part No.		Description
52	4-671-590-01		SHEET (MS) (C)
53	4-673-789-01		SPEAKER HOLDER L
56	9-885-033-70		CABLE (10P), FLEXIBLE FLAT
57	9-885-033-71		CABLE (11P), FLEXIBLE FLAT
58	A-8067-977-A	$	COMPLETE PWB IFX-257
59	A-8067-976-A	$	COMPLETE PWB SWX-137
60	4-677-458-01		SPERKER RING GULE
61	————		CAPTON TAPE (7X20) ———— ⚠ [ADD]
B2	4-669-867-01		SCREW (M2X4), SPECIAL HEAD

			J					AM					EU								AO					
Ref.No. Part No.		Description	GRT99/P	GRT77/B	GRT55/B	GRT770 *	GRT750 *	GRT170	GRT150	GRT100 *	GRT25F	GRT160	GRT716S	GRT796HP	GRT796SP	GRT795MP	GRT715M	GRT796SP	GRT786M	GRT785B	GRT785E	GRT30P	GRT25	GRT30LP	GRT30CP	GRT25CP	GRT25L
51	A-8116-009-A	SPEAKER UNIT(16)	●	●		●		●	●	●	●	●		●	●		●	●		●		●	●		●		●	
	9-885-033-59	SPEAKER UNIT(15)			●		●						●			●			●		●			●		●		●
54	4-673-747-01	SPEAKER HOLDER R(16)	●	●		●		●	●	●	●	●		●	●		●	●		●		●	●		●		●	
	4-673-790-01	SPEAKER HOLDER R(15)			●		●						●			●			●		●			●		●		●
55	X-4625-907-1	ASSY HOOD KEYBOARD(16)	●	●		●		●	●	●	●	●		●	●		●	●		●		●	●		●		●	
	X-4625-915-1	ASSY HOOD KEYBOARD(15)			●		●						●			●			●		●			●		●		●
B9	4-645-177-01	SCREW (M1.7X3.5)	●	●		●		●	●		●			●	●		●			●		●	●		●		●	
B23	4-639-112-01	SCREW (M2X4)			●		●			●	●		●	●		●	●		●		●		●	●		●		●

⚠ [MA]   ⚠ [MA]   ⚠ [MA]   ⚠ [MA]

⚠ [MA]   ⚠ [MA]   ⚠ [MA]

⚠ [MA]   ⚠ [MA]

• This parts list contains two different types of parts.
  The first type is the parts that are common to all models.
  The other type is the parts that are different depending on each model.
• The model that is accompanied by asterisk (∗) is the CTO model.

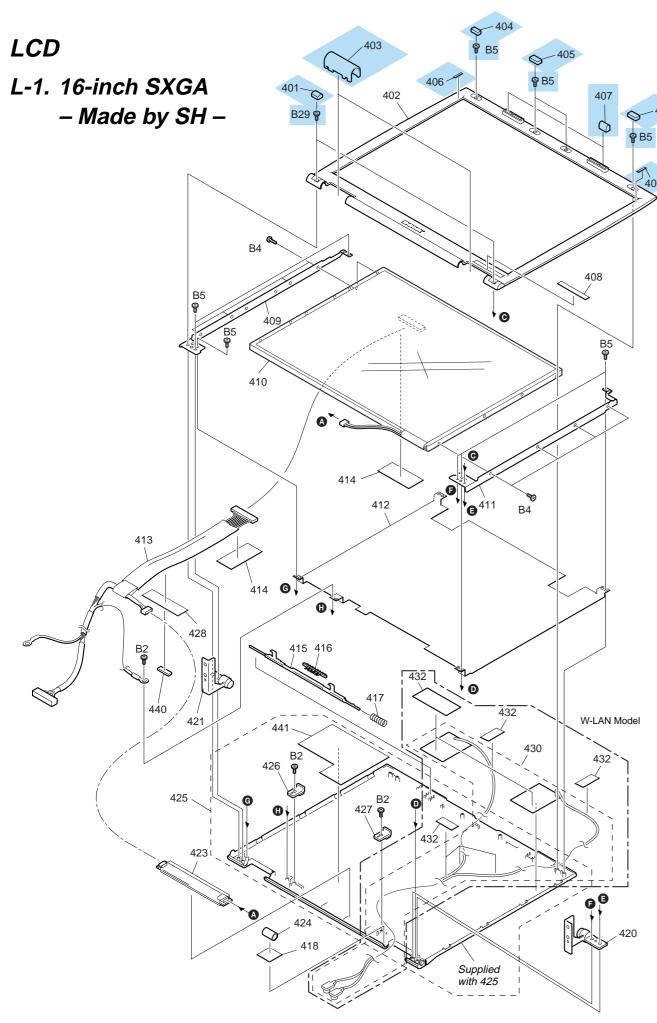・この部品表は，機種共通の部品と，機種によって使い分けが必要な部品に分かれています。
・機種名に (∗) がつくのは CTO モデルです。

4-15

4-16

PCG-GRT99/GRT77/GRT55 (J)
PCG-GRT170/GRT150/GRT25F/GRT160 (AM)
PCG-GRT716S/GRT796HP/GRT715E/GRT795MP/GRT715M/
PCG-GRT796SP/GRT786M/GRT785B/GRT785E (EU)
PCG-GRT30P/GRT25/GRT30LP/GRT30CP/GRT25CP/GRT25L (AO)

O-1. Other Parts

[COR]
14inch, 15inch LCD Model

16 inch LCD Model

15 inch LCD Model

W-LAN Model

W-LAN Model

Supplied with 352

VIF-31 Board

VIF-28 Board

16inch Model

⚠ [COR]

Ref.No.	Part No.	Description
352	X-4625-931-1	VGA HEAT PLATE ASSY
353	4-670-461-01	SHEET BLIND(PLATE HEATSINK)
354	4-673-987-01	VGA PLATE MYLAR
355	4-676-423-01	VGA THERMAL PAD
357	4-677-667-01	VGA PAD
358	4-677-943-01	VGA MYLAR
362	4-676-418-01	BRACKET HDD
364	4-653-801-01	SHEET HDD
B1	4-654-811-21	& SCREW M3
B2	4-669-867-01	& SCREW (M2X4), SPECIAL HEAD
B3	4-676-501-01	SCREW M2X6L,(K)B-NI,NY
B4	4-641-726-81	SCREW (M2), SPECIAL HEAD
B20	4-635-301-11	SCREW M3X4
B26	4-644-637-01	GRIP, M2 EG

⚠ [MA]

⚠ [MA]

				J					AM					EU								AO					
Ref.No.	Part No.			Description	GRT99/P	GRT77/B	GRT55/B	GRT770 *	GRT750 *	GRT170	GRT150	GRT100 *	GRT25F	GRT160	GRT716S	GRT796HP	GRT715E	GRT795MP	GRT715M	GRT796SP	GRT786M	GRT785B	GRT785E	GRT30P	GRT25	GRT30LP	GRT30CP	GRT25CP	GRT25L
108	4-676-948-01			RUBBER STOPPER		●	●	●		●		●	●	●						●	●	●			●	●	●		●	●
351	1-478-018-11	$	#	KEY BOARD UNIT (JP)	●	●	●	●		●																				
	1-478-018-21	$	#	KEY BOARD UNIT (US)							●	●	●		●															
	1-478-023-11	$	#	(UK/Dutch)...KEY BOARD UNIT (GB)										●	●	●	●	●		●	●	●							
	1-478-023-21	$	#	(German)...KEY BOARD UNIT (DE)											●	●	●	●		●	●	●							
	1-478-023-31	$	#	(Swiss)...KEY BOARD UNIT (CH)											●	●	●	●		●	●	●							
	1-478-023-41	$	#	(French)...KEY BOARD UNIT (FR)											●	●	●	●		●	●	●							
	1-478-023-51	$	#	(Italian)...KEY BOARD UNIT (IT)											●	●	●	●		●	●	●							
	1-478-023-81	$	#	(Spanish)...KEY BOARD UNIT (ES)										●															
	1-478-023-61	$	#	KEY BOARD UNIT (LA)																			●	●			●	●	
	1-478-018-31	$	#	KEY BOARD UNIT (KR)																					●				●
356	A-8067-970-A	$		COMPLETE PWB VIF-31		●	●	●		●		●	●	●			●				●	●			●	●	●		●	●
	A-8067-978-A	$		COMPLETE PWB VIF-28	●			●		●		●			●			●		●			●	●						
361	A-8067-943-A	$	#	ASSY HDD 80GB (I,40) (S)	●			●		●		●					●													
	A-8113-861-A	$	#	ASSY HDD 60GB(T-A) (S)		●	●	●		●		●		●				●			●			●	●		●	●		●
	A-8111-360-A	$	#	ASSY HDD 60GB(T,30)(S)							●																			
	A-8113-859-A	$	#	ASSY HDD 40GB(H) (S)				●		●		●				●	●				●	●		●			●	●	
	A-8115-795-A	$	#	ASSY HDD 40GB(F,30)(S)						●		●																		
	A-8113-860-A	$	#	ASSY HDD 30GB(H)(S)							●																			
363	4-673-715-01			DOOR HDD(16)	●	●		●		●		●			●			●		●			●							
	4-673-686-01			DOOR HDD(15)			●			●		●	●	●		●	●				●	●			●	●	●	●		●
371	X-4625-916-1			ASSY DISPLAY BASE			●			●		●		●		●		●		●			●		●	●	●			●
380	1-400-255-21			FERRITE CORE							●																			

⚠ [MA]   ⚠ [MA]   ⚠ [MA]   ⚠ [MA]

⚠ [MA]   ⚠ [MA]

⚠ [MA]   ⚠ [MA]

- This parts list contains two different types of parts.
  The first type is the parts that are common to all models.
  The other type is the parts that are different depending on each model.
- The model that is accompanied by asterisk (∗) is the CTO model.

・この部品表は，機種共通の部品と，機種によって使い分けが必要な部品に分かれています。
・機種名に (∗) がつくのは CTO モデルです。

Confidential

PCG-GRT99/GRT77/GRT55 (J)
PCG-GRT170/GRT150/GRT25F/GRT160 (AM)
PCG-GRT716S/GRT796HP/GRT715E/GRT795MP/GRT715M/
PCG-GRT796SP/GRT786M/GRT785B/GRT785E (EU)
PCG-GRT30P/GRT25/GRT30LP/GRT30CP/GRT25CP/GRT25L (AO)

LCD

L-1. 16-inch SXGA
– Made by SH –

Ref.No.	Part No.		Description
401	4-674-542-01	&	COVER SCREW LOWER
402	A-8115-904-A		ASSY HOUSING BEZEL/SH
403	4-667-073-11	&	COVER HINGE
404	4-674-540-01	&	COVER SCREW UPPER
405	4-674-541-01	&	COVER SCREW MIDDLE
			⚠ [COR] 4-673-716-01
406	4-672-201-11	&	CUSHION BEZEL
407	4-674-539-01	&	CUSHION LATCH
409	4-673-753-01		BRACKET LCD SH L
410	A-8112-385-A	$ #	LCD TFT 16.1' SXGA
411	4-673-752-01		BRACKET LCD SH R
412	4-676-870-01		SHIELD DISPLAY
413	9-885-031-90		LCD CABLE
414	4-677-679-01		FOIL LCD HARNESS
415	4-673-727-01		LATCH HONTAI
416	4-673-728-01		LATCH BUTTON
417	4-671-640-01		GT2 SPRING_LATCH
418	4-670-046-01		GT2 CUSHION WL CABLE
420	4-673-736-01		HINGE R
421	4-673-735-01		HINGE L
423	1-476-316-31		INVERTER UNIT
			⚠ [COR] 4-676-461-01
			⚠ [COR] 1-476-316-31
425	A-8115-902-A		ASSY HOUSING DISPLAY
426	4-673-730-01		LCD HOOK BASE L SH
427	4-673-731-01		LCD HOOK BASE R SH
428	4-672-403-01		COPPER TAPE LCD ED
440	4-676-424-01		LAN GASKET
			⚠ [COR] 4-676-461-01
441	4-677-784-01		FOIL INVERTER
B2	4-669-867-01		SCREW (M2X4), SPECIAL HEAD
B4	4-641-726-81		SCREW (M2), SPECIAL HEAD
B5	4-641-726-41	&	SCREW M2X6L,(K)B-NI,NY
B29	4-641-726-91	&	SCREW (M2), SPECIAL HEAD
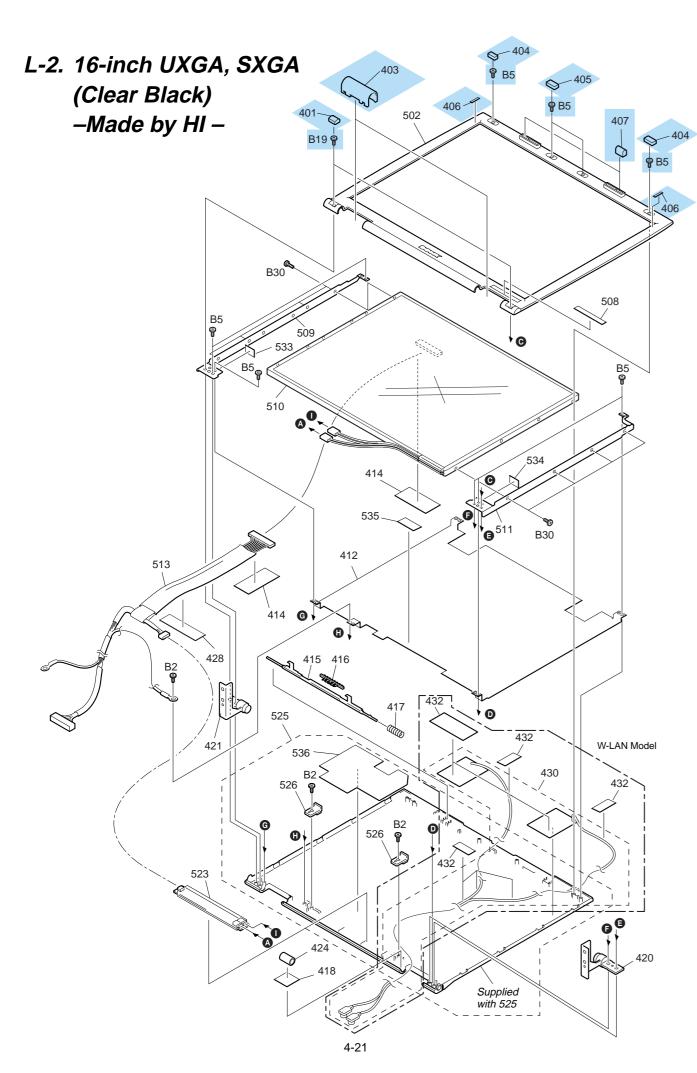
				AM		
			GRT150	GRT100 *	GRT100K *	GRT100P *
Ref.No.	Part No.	Description				
408	4-676-187-41	LABEL ID	●			
⚠ [ADD]	4-676-189-01	LABEL ID				●
⚠ [ADD]	4-676-189-11	LABEL ID		●		
⚠ [ADD]	4-676-189-21	LABEL ID			●	
424	4-670-045-01	GT2 TUBE WL CABLE		●	●	●
430	1-754-295-11	ANTENNA, FILM (L AND R)		●	●	●
432	---------------	FILAMENT TAPE		●	●	●

⚠ [ADD]

- This parts list contains two different types of parts.
  The first type is the parts that are common to all models.
  The other type is the parts that are different depending on each model.
- The model that is accompanied by asterisk (∗) is the CTO model.

・この部品表は，機種共通の部品と，機種によって使い分けが必要な部品に分かれています。
・機種名に (∗) がつくのは CTO モデルです。

W-LAN Model

Supplied with 425

PCG-GRT99/GRT77/GRT55 (J)
PCG-GRT170/GRT150/GRT25F/GRT160 (AM)
PCG-GRT716S/GRT796HP/GRT715E/GRT795MP/GRT715M/
PCG-GRT796SP/GRT786M/GRT785B/GRT785E (EU)
PCG-GRT30P/GRT25/GRT30LP/GRT30CP/GRT25CP/GRT25L (AO)

L-2. 16-inch UXGA, SXGA (Clear Black) –Made by HI –

Ref.No.	Part No.		Description
401	4-674-542-01	&	COVER SCREW LOWER
403	4-667-073-11	&	COVER HINGE
404	4-674-540-01	&	COVER SCREW UPPER
405	4-674-541-01	&	COVER SCREW MIDDLE
406	4-672-201-11	&	CUSHION BEZEL
407	4-674-539-01	&	CUSHION LATCH
412	4-676-870-01		SHIELD DISPLAY
414	4-677-679-01		FOIL LCD HARNESS
415	4-673-727-01		LATCH HONTAI
416	4-673-728-01		LATCH BUTTON
417	4-671-640-01		GT2 SPRING_LATCH
418	4-670-046-01		GT2 CUSHION WL CABLE
420	4-673-736-01		HINGE R
421	4-673-735-01		HINGE L
428	4-672-403-01		COPPER TAPE LCD ED
502	A-8115-903-A		ASSY HOUSING BEZEL/HI
509	4-673-750-01		BRACKET LCD HI L
511	4-673-749-01		BRACKET LCD HI R
513	9-885-031-89		LCD CABLE
523	1-478-040-11		INVERTER UNIT
525	A-8115-984-A		ASSY HOUSING DISPLAY 16(SBL)(S)
526	4-673-729-01		LCD HOOK BASE HI
533	4-676-481-01		SHEET BRACKET LCD L HIT
534	4-676-482-01		SHEET BRACKET LCD R HIT
535	4-670-396-01		SHEET COPPER(PLATE HEATSINK)
536	4-676-932-01		PLATE INVERTER
B2	4-669-867-01		SCREW (M2X4), SPECIAL HEAD
B5	4-641-726-41	&	SCREW (M2), SPECIAL HEAD
B19	4-641-726-91	&	SCREW (M2), SPECIAL HEAD
B30	4-636-559-01		SCREW (M2.5X4)

[COR] 4-673-716-01

[DEL]

					J				AM			EU	
				GRT99/P	GRT77/B	GRT770 *	GRT770P *	GRT100 *	GRT100K *	GRT100P *	GRT716S	GRT786M
Ref.No.	Part No.		Description									
424	4-670-045-01		GT2 TUBE WL CABLE					●	●	●		
430	1-754-295-11		ANTENNA, FILM (L AND R)					●	●	●		
432	-----------		FILAMENT TAPE					●	●	●		
508	4-676-187-01		LABEL ID	●								
	4-676-187-31		LABEL ID		●							
	4-676-188-01		LABEL ID						●			
	4-676-188-61		LABEL ID				●					
	4-676-189-01		LABEL ID							●		
	4-676-189-11		LABEL ID					●				
	4-676-189-21		LABEL ID						●			
	4-676-191-01		LABEL ID								●	
	4-676-191-61		LABEL ID									●
510	A-8115-722-A	$ #	LCD TFT 16.0' UXGA-HI	●		●	●	●	●			
	A-8115-721-A	$ #	LCD TFT 16.0' SXGA+-HI		●	●	●	●	●	●	●	●

[ADD]
[ADD]
[ADD]
[ADD]
[ADD]
[MA]
[ADD]
[MA]

- This parts list contains two different types of parts.
  The first type is the parts that are common to all models.
  The other type is the parts that are different depending on each model.
- The model that is accompanied by asterisk (∗) is the CTO model.
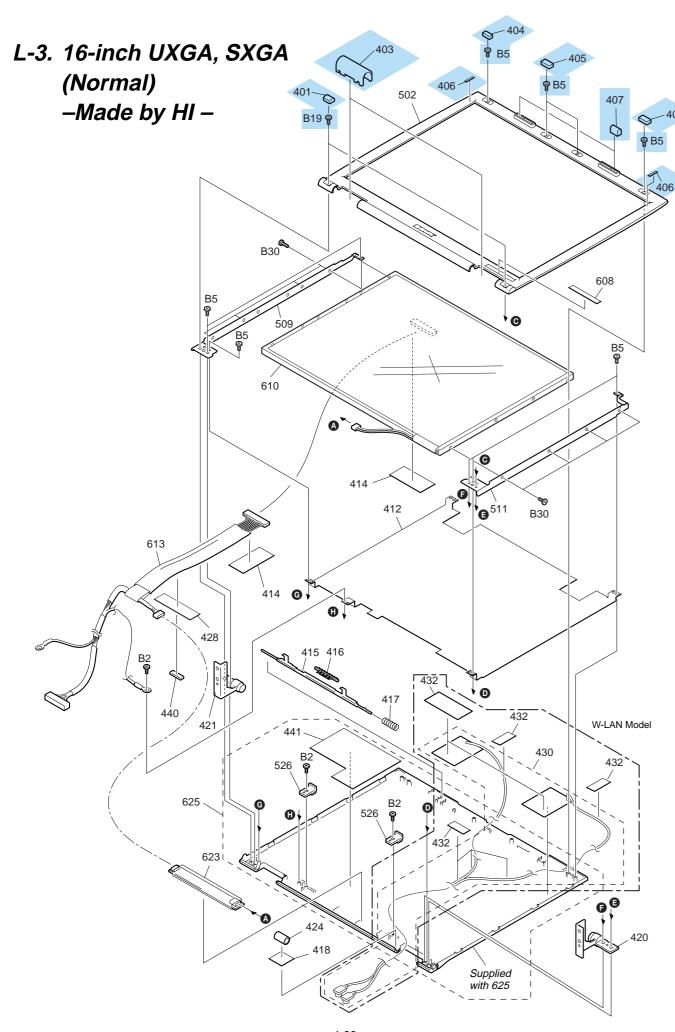
・この部品表は，機種共通の部品と，機種によって使い分けが必要な部品に分かれています。
・機種名に (∗) がつくのは CTO モデルです。

PCG-GRT99/GRT77/GRT55 (J)
PCG-GRT170/GRT150/GRT25F/GRT160 (AM)
PCG-GRT716S/GRT796HP/GRT715E/GRT795MP/GRT715M/
PCG-GRT796SP/GRT786M/GRT785B/GRT785E (EU)
PCG-GRT30P/GRT25/GRT30LP/GRT30CP/GRT25CP/GRT25L (AO)

4-21   4-22

L-3. 16-inch UXGA, SXGA (Normal)
–Made by HI –

Ref.No.	Part No.	Description
401	4-674-542-01	& COVER SCREW LOWER
403	4-667-073-11	& COVER HINGE
404	4-674-540-01	& COVER SCREW UPPER
405	4-674-541-01	& COVER SCREW MIDDLE
406	4-672-201-11	& CUSHION BEZEL
		⚠ [COR] 4-673-716-01
407	4-674-539-01	& CUSHION LATCH
412	4-676-870-01	SHIELD DISPLAY
414	4-677-679-01	FOIL LCD HARNESS
415	4-673-727-01	LATCH HONTAI
416	4-673-728-01	LATCH BUTTON
417	4-671-640-01	GT2 SPRING LATCH
418	4-670-046-01	GT2 CUSHION WL CABLE
420	4-673-736-01	HINGE R
421	4-673-735-01	HINGE L
428	4-672-403-01	COPPER TAPE LCD ED
		⚠ [COR] 4-676-461-01
440	4-676-424-01	LAN GASKET
441	4-677-784-01	FOIL INVERTER
502	A-8115-903-A	ASSY HOUSING BEZEL/HI
509	4-673-750-01	BRACKET LCD HI L
511	4-673-749-01	BRACKET LCD HI R
526	4-673-729-01	LCD HOOK BASE HI
613	9-885-031-91	LCD CABLE
623	1-477-101-11	INVERTER UNIT
625	A-8115-983-A	ASSY HOUSING DISPLAY 16(HI)(S)
B2	4-669-867-01	SCREW (M2X4), SPECIAL HEAD
B5	4-641-726-41	& SCREW (M2), SPECIAL HEAD
B19	4-641-726-91	& SCREW (M2), SPECIAL HEAD
B30	4-636-559-01	SCREW (M2.5X4)

			J		AM			EU		AO		
			GRT770 *	GRT770P *	GRT170	GRT100 *	GRT100K *	GRT100P *	GRT796HP	GRT796SP	GRT30P	GRT30LP	GRT30CP
Ref.No.	Part No.	Description											
424	4-670-045-01	GT2 TUBE WL CABLE			●	●	●	●	●	●	●	●	●
430	1-754-295-11	ANTENNA, FILM (L AND R)			●	●	●	●	●	●	●	●	●
432	----------	FILAMENT TAPE			●	●	●	●	●	●	●	●	●
⚠ [MA] 608	4-676-187-21	LABEL ID			●								
	4-676-191-21	LABEL ID							●				
	4-676-191-11	LABEL ID								●			
	4-676-188-11	LABEL ID									●		
⚠ [MA]	4-676-188-21	LABEL ID										●	
⚠ [ADD]	4-676-188-01	LABEL ID		●									
⚠ [ADD]	4-676-188-61	LABEL ID	●										
⚠ [ADD]	4-676-189-01	LABEL ID							●				
⚠ [ADD]	4-676-189-11	LABEL ID				●							
⚠ [ADD]	4-676-189-21	LABEL ID					●						
⚠ [MA]	4-676-192-01	LABEL ID											●
610	A-8059-922-A $ #	ASSY LCD 16 U(SH)(S)	●	●		●	●	●		●	●	●	●
	A-8067-707-A $ #	ASSY LCD 16SXGA(HI)(S)	●	●	●	●	●	●	●				

⚠ [ADD]   ⚠ [MA]   ⚠ [MA]

- This parts list contains two different types of parts.
  The first type is the parts that are common to all models.
  The other type is the parts that are different depending on each model.
- The model that is accompanied by asterisk (∗) is the CTO model.

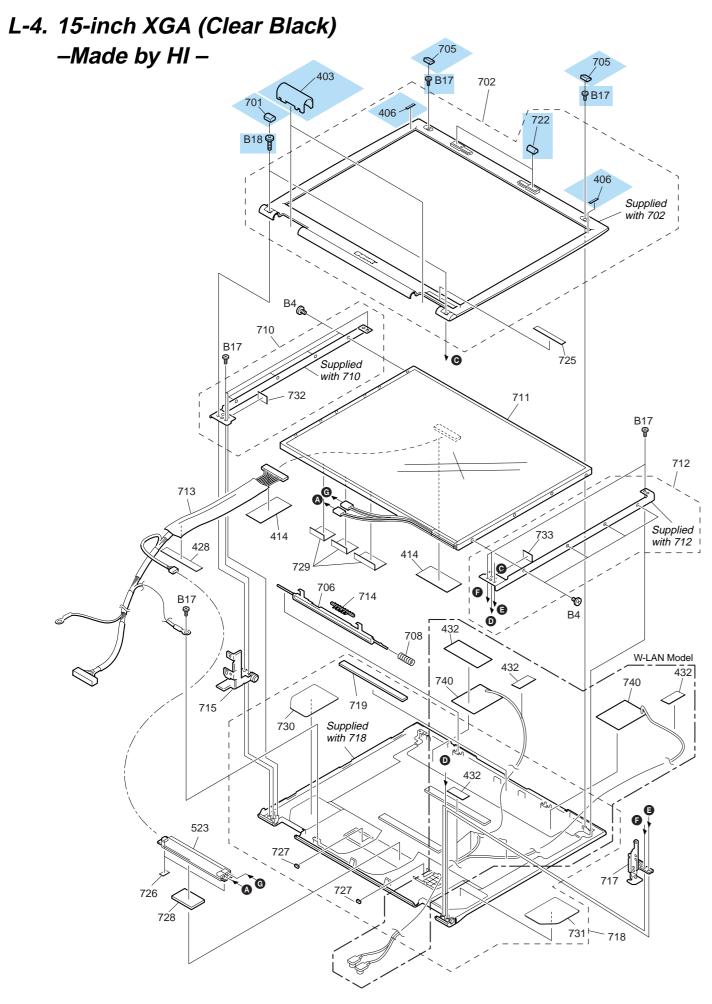・この部品表は，機種共通の部品と，機種によって使い分けが必要な部品に分かれています。
・機種名に (∗) がつくのは CTO モデルです。

L-4. 15-inch XGA (Clear Black)
–Made by HI –

Ref.No.	Part No.		Description
403	4-667-073-11	&	COVER HINGE
406	4-672-201-11	&	CUSHION BEZEL
414	4-677-679-01		FOIL LCD HARNESS
428	4-672-403-01		COPPER TAPE LCD ED
523	1-478-040-11		INVERTER UNIT
701	4-672-197-11	&	COVER SCREW LOWER
702	A-8115-900-A		ASSY HOUSING BEZEL 15 HIT
705	4-672-198-11	&	COVER SCREW UPPER
706	4-673-710-01		LATCH HONTAI
708	4-672-199-01		SPRING (LATCH), COMPRESSION
710	X-4626-189-1		ASSY BRACKET LCD L HIT
711	A-8115-792-A	$ #	ASSY LCD 15XGA(HI)(S)
712	X-4626-190-1		ASSY BRACKET LCD R HIT
713	9-885-031-25		LCD HARNESS
714	4-670-668-11		LATCH BUTTON
715	4-673-807-01		HINGE L
717	4-673-808-01		HINGE R
718	A-8115-897-A		ASSY DISPLAY HOUSING 15 (SBR)(S)
719	4-676-424-01		SHEET DISPLAY HOUSING HIT
722	4-672-202-11	&	CUSHION LATCH
726	4-676-478-01		SHEET DISPLAY HOUSING HIT 2
727	4-676-479-01		SHEET DISPLAY HOUSING HIT 3
728	4-676-422-01		SHEET PLATE LCD
729	4-676-480-01		FOIL LCD HIT
730	4-677-670-01		SHEET PLATE LCD L
731	4-677-669-01		SHEET PLATE LCD R
732	4-676-481-01		SHEET BRACKET LCD L HIT
733	4-676-482-01		SHEET BRACKET LCD R HIT
B4	4-641-726-81		SCREW (M2), SPECIAL HEAD
B17	4-641-726-61	&	SCREW (M2), SPECIAL HEAD
B18	4-664-453-21	&	SCREW (M2X7), SPECIAL HEAD

⚠ [MA]

			GRT55/B	J GRT750P ✲	J GRT750P ✲	GRT100 ✲	AM GRT100K ✲	AM GRT100P ✲	GRT160
Ref.No.	Part No.	Description							
432	----------	FILAMENT TAPE				●	●	●	●
725	4-676-187-51	LABEL ID	●						
	4-676-187-62	LABEL ID							●
	4-676-188-71	LABEL ID		●					
	4-676-188-31	LABEL ID			●				
	4-676-189-01	LABEL ID						●	
	4-676-189-11	LABEL ID					●		
	4-676-189-21	LABEL ID						●	
740	1-754-295-21	ANTENNA, FILM (L AND R)				●	●	●	●

⚠ [ADD]

⚠ [ADD]

⚠ [MA]

- This parts list contains two different types of parts.
  The first type is the parts that are common to all models.
  The other type is the parts that are different depending on each model.
- The model that is accompanied by asterisk (✲) is the CTO model.

・ この部品表は，機種共通の部品と，機種によって使い分けが必要な部品に分かれています。
・ 機種名に (✲) がつくのは CTO モデルです。

L-5. 15-inch SXGA, XGA (Normal, High Brightness) –Made by SH –

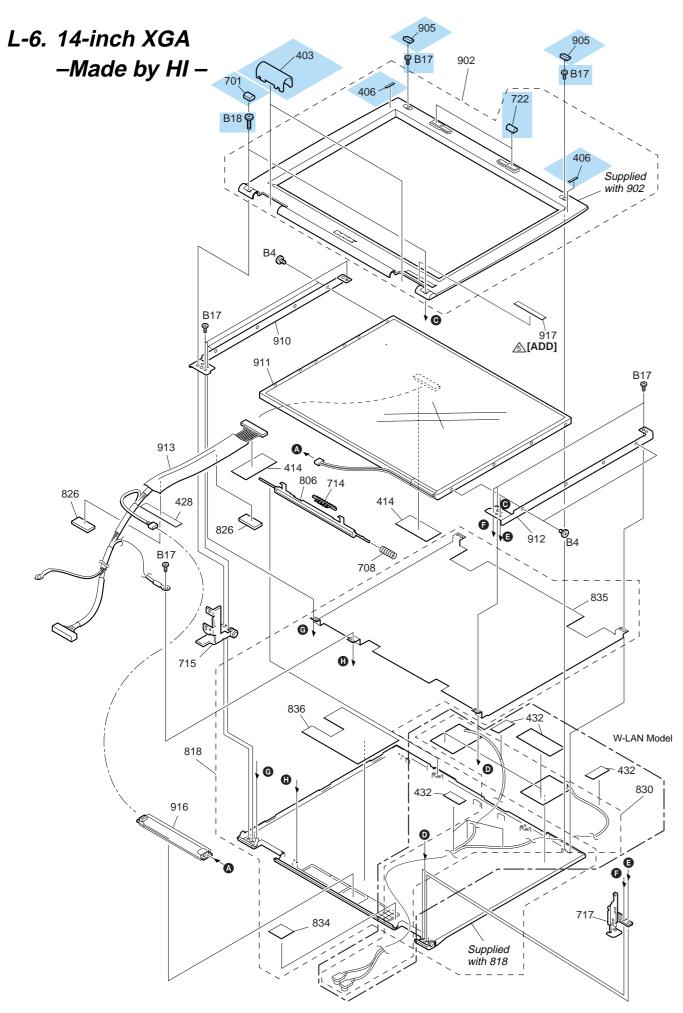Supplied with 802

Supplied with 818

W-LAN Model

Ref.No.	Part No.		Description
403	4-667-073-11	&	COVER HINGE
406	4-672-201-11	&	CUSHION BEZEL
414	4-677-679-01		FOIL LCD HARNESS
423	1-476-316-31		INVERTER UNIT
428	4-672-403-01		COPPER TAPE LCD ED
701	4-672-197-11	&	COVER SCREW LOWER
705	4-672-198-11	&	COVER SCREW UPPER
708	4-672-199-01		SPRING (LATCH), COMPRESSION
714	4-670-668-11		LATCH BUTTON
715	4-673-807-01		HINGE L
717	4-673-808-01		HINGE R
722	4-672-202-11	&	CUSHION LATCH
802	A-8115-899-A		ASSY HAOUSING BEZEL 15(S)
806	4-670-669-11		LATCH HONTAI
* 810	4-671-115-01		BRACKET LCD 15 (L)
* 812	4-671-114-02		BRACKET LCD 15 (R)
818	A-8115-898-A		ASSY HOUSING DISPLAY 15(S)
826	4-677-683-01		DISPLAY GASKET
834	4-673-316-01		GT2 CUSHION WL CABLE
835	4-677-672-01		SHIELD DISPLAY
836	4-677-680-01		FOIL HOUSING DISPLAY
B4	4-641-726-81		SCREW (M2), SPECIAL HEAD
B17	4-641-726-61	&	SCREW (M2), SPECIAL HEAD
B18	4-664-453-21	&	SCREW (M2X7), SPECIAL HEAD

⚠ [ADD]

			J		AM						EU				AO	
Ref.No.	Part No.	Description	GRT750 ✳	GRT750P ✳	GRT100 ✳	GRT100K ✳	GRT100P ✳	GRT25F	GRT715E	GRT715M	GRT795MP	GRT785B	GRT785E	GRT25	GRT25CP	GRT25L
432	----------	FILAMENT TAPE			●	●	●									
811	A-8115-790-A $ #	ASSY LCD 15XGA(SH)(S)			●	●	●		●	●			●			
	A-8110-581-A $ #	ASSY LCD 15SX(SH4)(S)			●	●	●				●	●				
	A-8113-853-A $ #	ASSY LCD 15(SH)GT2(S)	●	●	●	●	●	●				●		●	●	●
813	9-885-031-28	15XGA N/B HARNESS	●	●	●	●	●	●				●		●	●	●
	9-885-031-26	LCD HARNESS SXGA+			●	●	●				●	●				
	9-885-031-27	15XGA N/B/L HARNESS			●	●	●		●	●			●			
825	4-676-191-31	LABEL ID									●					
	4-676-191-41	LABEL ID							●							
	4-676-191-51	LABEL ID										●				
	4-676-189-31	LABEL ID						●								
	4-676-188-41	LABEL ID												●		
	4-676-192-11	LABEL ID													●	
	4-676-188-51	LABEL ID														●
	4-676-191-71	LABEL ID											●			
	4-676-191-81	LABEL ID														
	4-676-188-71	LABEL ID	●													
	4-676-188-31	LABEL ID		●												
	4-676-189-01	LABEL ID						●								
	4-676-189-11	LABEL ID			●											
	4-676-189-21	LABEL ID				●										
830	1-754-295-21	ANTENNA, FILM (L AND R)			●	●	●				●		●			

⚠ [MA]
⚠ [MA]
⚠ [MA]
⚠ [ADD]
⚠ [MA]
⚠ [MA]
⚠ [MA]
⚠ [ADD]
⚠ [MA]
⚠ [MA]

• This parts list contains two different types of parts.
The first type is the parts that are common to all models.
The other type is the parts that are different depending on each model.
• The model that is accompanied by asterisk (✳) is the CTO model.

・この部品表は，機種共通の部品と，機種によって使い分けが必要な部品に分かれています。
・機種名に (✳) がつくのは CTO モデルです。

L-6. 14-inch XGA
–Made by HI –

Ref.No.	Part No.		Description
403	4-667-073-11	&	COVER HINGE
406	4-672-201-11	&	CUSHION BEZEL
418	4-677-679-01		FOIL LCD HARNESS
428	4-672-403-01		COPPER TAPE LCD ED
432	————		FILAMENT TAPE
701	4-672-197-11	&	COVER SCREW LOWER
708	4-672-199-01		SPRING (LATCH), COMPRESSION
714	4-670-668-11		LATCH BUTTON
715	4-673-807-01		HINGE L
717	4-673-808-01		HINGE R
722	4-672-202-11	&	CUSHION LATCH
806	4-670-669-11		LATCH HONTAI
818	A-8115-898-A		ASSY HOUSING DISPLAY 15
826	4-677-683-01		DISPLAY GASKET
830	1-754-295-31		ANTENNA, FILM (L AND R)
834	4-673-316-01		GT2 CUSHION WL CABLE
835	4-677-672-01		SHIELD DISPLAY
836	4-677-680-01		FOIL HOUSING DISPLAY
902	A-8115-901-A		ASSY HOUSING BEZEL 14
905	4-672-203-11	&	COVER SCREW UPPER 14
* 910	4-671-117-01		BRACKET LCD 14 (L)
911	A-8113-928-A	$ #	LCD UNIT(14.1XGA)(H)(S)
* 912	4-671-116-01		BRACKET LCD 14 (R)
913	9-885-031-28		15XGA N/B HARNESS
916	1-476-317-21		INVERTER UNIT
B4	4-641-726-81		SCREW (M2), SPECIAL HEAD
B17	4-641-726-61	&	SCREW (M2), SPECIAL HEAD
B18	4-664-453-21	&	SCREW (M2X7), SPECIAL HEAD

			AM		
			GRT100 *	GRT100K *	GRT100P *
Ref.No.	Part No.	Description			
917	4-676-189-01	LABEL ID			●
	4-676-189-11	LABEL ID	●	●	
	4-676-189-21	LABEL ID		●	

⚠ [ADD]
⚠ [ADD]
⚠ [ADD]

⚠ [ADD]

Supplied with 902

Supplied with 818

W-LAN Model

PCG-GRT99/GRT77/GRT55 (J)
PCG-GRT170/GRT150/GRT25F/GRT160 (AM)
PCG-GRT716S/GRT796HP/GRT715E/GRT795MP/GRT715M/
PCG-GRT796SP/GRT786M/GRT785B/GRT785E (EU)
PCG-GRT30P/GRT25/GRT30LP/GRT30CP/GRT25CP/GRT25L (AO)

A-1. Accessory

1001 AC Adaptor

1003 Battery Pack

1004 Power Cord

1005 Power Cord

1006 Power Cord

1007 Connection Cord

1008 Coversion Plug 3P Adaptor

1009 Attenuator

1010 Combo Dummy

1011 Antena Cable

1012 Remote Commander

1013 RAY-Catcher Unit

⚠ **[MA]** **1014** Power Cord

⚠ **[MA]** **1015** Power Cord

⚠ **[MA]** **1016** Power Cord

⚠ **[MA]**

⚠ **[MA]**

⚠ **[MA]**

⚠ **[MA]**

⚠ **[COR]** 4-676-093-01

⚠ **[MA]**   ⚠ **[MA]**   ⚠ **[MA]**

⚠ **[MA]**   ⚠ **[MA]**

⚠ **[MA]**

⚠ **[MA]**

					J					AM							EU								AO					
					GRT99/P	GRT77/B	GRT55/B	GRT770*	GRT750*	GRT170	GRT150	GRT100*	GRT25F	GRT160	GRT716S	GRT796HP	GRT715E	GRT795MP	GRT715M	GRT796SP	GRT786M	GRT785B	GRT785E	GRT30P	GRT25	GRT30LP	GRT30CP	GRT25CP	GRT25L
Ref.No.	Part No.			Description																										
⚠ 1001	1-478-037-12	$	&	ADAPTOR, AC				●	●	●	●	●	●	●	●	●	●	●		●	●	●	●	●	●	●	●	●	●
⚠	1-478-038-12	$	&	ADAPTOR, AC	●	●	●	●											●											
1003	A-8067-763-A	$ #	&	BP2NX SNT(J)ASSY(S)	●	●	●	●																						
	A-8112-427-A	$ #	&	BP2NX SNT(U)ASSY(S)						●	●	●		●															
	1-756-269-42	$ #	&	BATTERY PACK, LITHIUM ION											●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
⚠ 1004	1-575-131-61		&	CORD, POWER											●	●	●	●	●	●	●	●	●						
⚠ 1005	1-757-562-21		&	CORD, POWER						●	●	●	●	●															
⚠ 1006	1-790-732-32		&	CORD, POWER	●	●	●	●	●																				
1007	1-783-801-22		&	CORD, CONNECTION											●	●	●	●	●	●	●	●	●	●					
1008	1-770-019-12		&	ADAPTOR, CONVERSION PLUG 3P											●	●	●	●	●	●	●	●	●					●	
1009	1-417-396-11		&	ATTENUATOR ASSY	●	●	●	●	●			●																		
1010	4-673-694-01		&	COMBO DUMMY	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
1011	1-556-965-61		&	CABLE, ANTENNA	●	●	●	●	●			●																		
	1-827-607-11		&	CABLE, RF FILTER								●																		
⚠ 1012	1-477-556-21		&	REMOTE COMMANDER	●	●	●	●	●			●																		
	1-477-900-11		&	REMOTE COMMANDER								●																		
1013	1-477-218-41		&	RAY-CATCHER UNIT	●	●	●	●	●			●																		
⚠ 1014	1-555-074-31		&	CORD, POWER																				●	●					
⚠ 1015	1-823-947-32		&	POWER-SUPPLY CORD																						●	●			●
⚠ 1016	1-782-476-22		&	CORD, POWER																								●	●	
	1-400-255-21		&	FERRITE CORE						●		●		●		●		●		●				●	●					
	1-816-429-12		&	(UK)...PHONE PLUG (GB)											●	●	●	●	●	●	●	●	●						
	1-816-429-22		&	(Dutch)...PHONE PLUG (NL)											●	●	●	●	●	●	●	●	●						
	1-816-429-32		&	(German)...PHONE PLUG (DE)											●	●	●	●	●	●	●	●	●						
	1-816-429-42		&	(Swiss)...PHONE PLUG (CH)											●	●	●	●	●	●	●	●	●						
	1-816-429-52		&	(Austrian)...PHONE PLUG (AT)											●	●	●	●	●	●	●	●	●						
	1-816-429-62		&	(French)...PHONE PLUG (FR)											●	●	●	●	●	●	●	●	●						
	1-816-429-72		&	(Italian)...PHONE PLUG (IT)											●	●	●	●	●	●	●	●	●						
	4-675-639-01		&	GETTING STARTED BOOKLET 27X0											●	●	●	●	●	●	●	●	●						
	4-675-433-01		&	Instruction Manual (XP)	●	●	●	●	●																				
	4-676-887-01		&	QUICK START						●	●			●															
	4-676-638-01		&	QUICK START								●																	
	4-676-666-11		&	Instruction Manual (XP)																				●	●					
	4-676-666-21		&	Instruction Manual (XP)																						●	●			
	4-676-672-31		&	Instruction Manual (XP)																								●	●	●

4-31
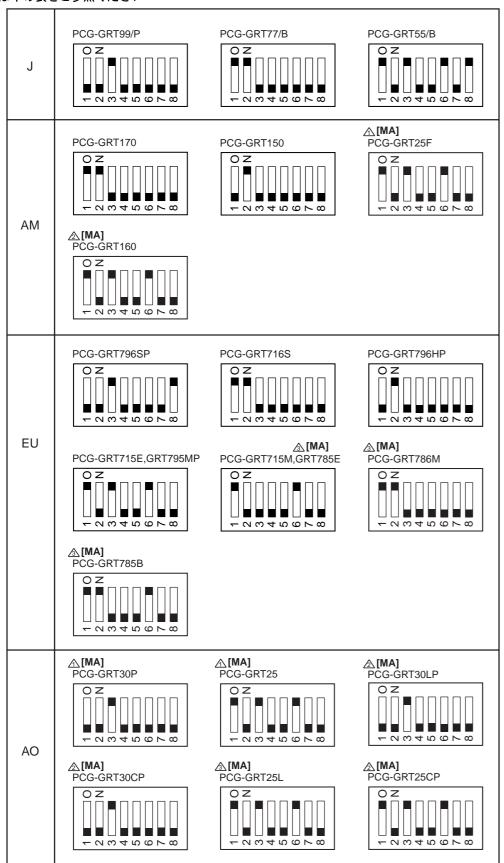
4-32
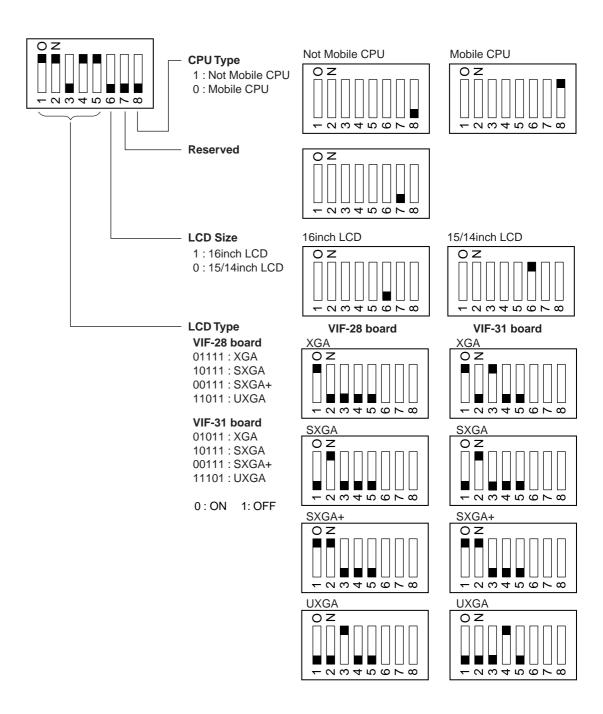
PCG-GRT99/GRT77/GRT55 (J)
PCG-GRT170/GRT150/GRT25F/GRT160 (AM)
PCG-GRT716S/GRT796HP/GRT715E/GRT795MP/GRT715M/
PCG-GRT796SP/GRT786M/GRT785B/GRT785E (EU)
PCG-GRT30P/GRT25/GRT30LP/GRT30CP/GRT25CP/GRT25L (AO)

DIP Switch

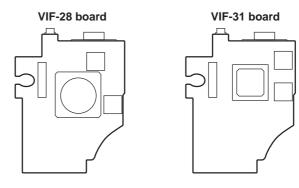The DIP switch setting is following table.

DIPスイッチの設定は下の表をご参照ください

J	PCG-GRT99/P	PCG-GRT77/B	PCG-GRT55/B
AM	PCG-GRT170 ⚠[MA] PCG-GRT160	PCG-GRT150	⚠[MA] PCG-GRT25F
EU	PCG-GRT796SP PCG-GRT715E,GRT795MP ⚠[MA] PCG-GRT785B	PCG-GRT716S ⚠[MA] PCG-GRT715M,GRT785E	PCG-GRT796HP ⚠[MA] PCG-GRT786M
AO	⚠[MA] PCG-GRT30P ⚠[MA] PCG-GRT30CP	⚠[MA] PCG-GRT25 ⚠[MA] PCG-GRT25L	⚠[MA] PCG-GRT30LP ⚠[MA] PCG-GRT25CP

4-33

CPU Type
1 : Not Mobile CPU
0 : Mobile CPU

Not Mobile CPU

Mobile CPU

Reserved

LCD Size
1 : 16inch LCD
0 : 15/14inch LCD

16inch LCD

15/14inch LCD

LCD Type

VIF-28 board
01111 : XGA
10111 : SXGA
00111 : SXGA+
11011 : UXGA

VIF-31 board
01011 : XGA
10111 : SXGA
00111 : SXGA+
11101 : UXGA

0 : ON   1: OFF

VIF-28 board   XGA

VIF-31 board   XGA

SXGA

SXGA

SXGA+

SXGA+

UXGA

UXGA

The DIP switch setting is different depending the types of LCD, CPU and VIF board.
Set the DIP switch of the CTO model in accordance with the above table.
For the method of identifying the types of the VIF board, see the illustration shown below.

DIPスイッチの設定は，LCDやCPU，VIF基板の種類により異なります。
CTOモデルは，上の表に従ってDIPスイッチを設定してください。
VIF基板の見分け方については，下記の図をご覧ください。

VIF-28 board

VIF-31 board

Confidential

PCG-GRT99/GRT77/GRT55 (J)
PCG-GRT170/GRT150/GRT25F/GRT160 (AM)
PCG-GRT716S/GRT796HP/GRT715E/GRT795MP/GRT715M/
PCG-GRT796SP/GRT786M/GRT785B/GRT785E (EU)
PCG-GRT30P/GRT25/GRT30LP/GRT30CP/GRT25CP/GRT25L (AO)

4-34
(END)

CHAPTER 5.
OTHERS

5-1. バーコードラベルについて

バーコードラベルの見方

バーコードラベルの網掛け部は，修理データとして使用いたします。

5-1. The barcode label

The hatched portion of the barcode label is used as the repair data.

[MBX-86 Board] (Side A)

[HDD] (Made by I) (Top)
C1
C2
C3
B, D

[DVD+-RW Drive] (Made by So) (Top)
C
B, D

F
G

[MBX-86 Board] (Side B)
A, B

C

[HDD] (Made by Hi) (Top)
D2
D1

[DVD-RW Drive] (Made by To) (Top)
C
B, D

[Wireless LAN Card]
G

[HDD] (Made by Fu) (Top)
D

[DVD-RW Drive] (Made by Pa) (Top)
C
B, D

[Modem Card]
C

B, D

[Combination Drive] (Made by Pa) (Top)
C
B, D

[LCD Unit (16-inch UXGA Clear Black) (HI)]
(Rear)
B

[LCD Unit (15-inch XGA) (SH)] (Rear)
E
B

[LCD Unit (16-inch SXGA Clear Black) (HI)]
(Rear)
B

[LCD Unit (15-inch SXGA) (SH)] (Rear)
E
B

[LCD Unit (16-inch SXGA+) (HI)] (Rear)
B

[LCD Unit (15-inch XGA Clear Black) (HI)]
(Rear)
B

[LCD Unit (16-inch SXGA+) (HI)] (Rear)
B

[LCD Unit (14-inch XGA) (HI)] (Rear)
B

[LCD Unit (16-inch SXGA) (SH)] (Rear)
B, C

A   : Parts No.
B   : Serial No.
C   : Revision No.
D   : Product code
E   : Maker Barcode
F   : Global User ID (iLink)
G   : Mac Address
☐   : Barcode

5-2. Replacing the CPU

1. Removing the CPU

① Insert a flat-blade screwdriver into the notch as shown in the illustration and rotate it so that the protrusion comes to the lock release position.

② Pull the CPU gently upward to lift it out of the CPU socket.

Lock position

Lock release position

CPU

CPU socket

2. Installing the CPU

① Align the triangle reference mark of the CPU with that of the CPU socket and insert all the pins of the CPU to the corresponding holes of the CPU socket.

② Insert a flat-blade screwdriver into the notch as shown in the illustration and rotate it so that the protrusion comes to the lock position.

Lock release position

Lock position

Reference marks

CPU

CPU socket

NOTE:

Rotate a flat-blade screwdriver to the lock position securely. If not, the operation of the CPU may become unstable.

5-3. CTO Information

1. PCG-GRT770

Model name : PCG-GRT770P (Japanese Area)
Model number : PCG-8M2Q
OS:WindowsXP Pro
Ver.1.0

LCD	**16.1 UXGA(Clear Black)** A-8115-722-A LCD UNIT(16TFT-UXGA-HI)(S)	**16.1 UXGA** A-8059-922-A ASSY LCD 168(HI)(S)	**16.1 SXGA+(Clear Black)** A-8115-721-A LCD UNIT(16TFT-SXGA+-HI)(S)	**16.1 SXGA+** A-8067-707-A ASSY LCD 16SXGA(HI)(S)
CPU	**P4-2.8GHz** 6-704-133-01 IC RK80532PE072512SL6S4	**P4-2.40B GHz** 6-704-128-01 IC RK80532PE056512SL6RZ	**Cel-1.8GHz** 6-703-826-01 IC RH80532NC033256	
Memory	**512MB**(512MBx1) A-8067-880-A COMPLETE PWB MM-10	**256MB**(256MBx1) 6-704-094-01 IC MT8VDDT3264HDG-265C3		
HDD	**80GB** A-8067-943-A ASSY HDD 80GB(I,40)(S)	**60GB** A-8111-360-A ASSY HDD 60GB(T,30)(S)	**40GB** A-8113-859-A ASSY HDD 40GB(H)(S)	
Optical	**DVD+-RW** 8-457-509-00 DVD DRIVE,DW-U50A-VN			
Gigapo	○	×		
Battery	**PCGA-BP2NX** A-8067-763-A BP2NX SNT(J)ASSY(S)			

Model name : PCG-GRT770 (Japanese Area)
Model number : PCG-8M2Q
OS:WindowsXP Home
Ver.1.0

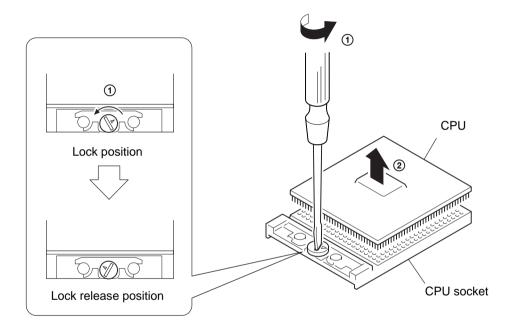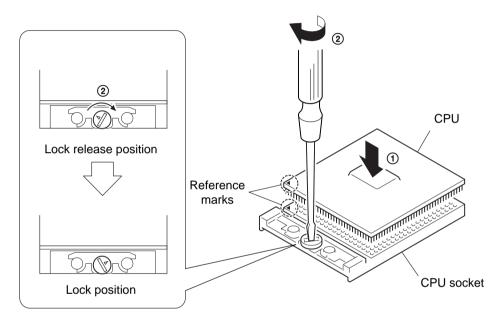| LCD	**16.1 UXGA(Clear Black)** A-8115-722-A LCD UNIT(16TFT-UXGA-HI)(S)	**16.1 UXGA** A-8059-922-A ASSY LCD 168(HI)(S)	**16.1 SXGA+(Clear Black)** A-8115-721-A LCD UNIT(16TFT-SXGA+-HI)(S)	**16.1 SXGA+** A-8067-707-A ASSY LCD 16SXGA(HI)(S)
CPU	**P4-2.8GHz** 6-704-133-01 IC RK80532PE072512SL6S4	**P4-2.40B GHz** 6-704-128-01 IC RK80532PE056512SL6RZ	**Cel-1.8GHz** 6-703-826-01 IC RH80532NC033256	
Memory	**512MB**(512MBx1) A-8067-880-A COMPLETE PWB MM-10	**256MB**(256MBx1) 6-704-094-01 IC MT8VDDT3264HDG-265C3		
HDD	**80GB** A-8067-943-A ASSY HDD 80GB(I,40)(S)	**60GB** A-8111-360-A ASSY HDD 60GB(T,30)(S)	**40GB** A-8113-859-A ASSY HDD 40GB(H)(S)	
Optical	**DVD+-RW** 8-457-509-00 DVD DRIVE,DW-U50A-VN			
Gigapo	○	×		
Battery	**PCGA-BP2NX** A-8067-763-A BP2NX SNT(J)ASSY(S)			

PCG-GRT99/GRT77/GRT55 (J)
PCG-GRT170/GRT150/GRT25F/GRT160 (AM)
PCG-GRT716S/GRT796HP/GRT715E/GRT795MP/GRT715M/
PCG-GRT796SP/GRT786M/GRT785B/GRT785E (EU)
PCG-GRT30P/GRT25/GRT30LP/GRT30CP/GRT25CP/GRT25L (AO)

5-4   5-5

2. PCG-GRT750

Model name : PCG-GRT750P (Japanese Area)
Model number : PCG-8M2Q
OS:WindowsXP Pro
Ver.1.0

LCD	**15 XGA(Clear Black)** A-8115-792-A ASSY LCD 15XGA(HI)(S)	**15 XGA** A-8115-790-A ASSY LCD 15XGA(SH)(S)	
CPU	**P4-2.8GHz** 6-704-133-01 IC RK80532PE072512SL6S4	**P4-2.40B GHz** 6-704-128-01 IC RK80532PE056512SL6RZ	**MCel-1.8GHz** 6-703-826-01 IC RH80532NC033256
Memory	**512MB**(512MBx1) A-8067-880-A COMPLETE PWB MM-10	**256MB**(256MBx1) 6-600-158-01 IC HYS64D32020GDL-7-B	
HDD	**80GB** A-8067-943-A ASSY HDD 80GB(I,40)(S)	**60GB** A-8111-360-A ASSY HDD 60GB(T,30)(S)	**40GB** A-8113-859-A ASSY HDD 40GB(H)(S)
Optical	**DVD+-RW** 8-457-509-00 DVD DRIVE,DW-U50A-VN	**CD-RW/DVD-ROM** 1-796-594-11 COMBO DRIVE(UJDA740)	
Gigapo	○	×	
Battery	**PCGA-BP2NX** A-8067-763-A BP2NX SNT(J)ASSY(S)		

Model name : PCG-GRT750 (Japanese Area)
Model number : PCG-8M2Q
OS:WindowsXP Home
Ver.1.0

LCD	**15 XGA(Clear Black)** A-8115-792-A ASSY LCD 15XGA(HI)(S)	**15 XGA** A-8115-790-A ASSY LCD 15XGA(SH)(S)	
CPU	**P4-2.8GHz** 6-704-133-01 IC RK80532PE072512SL6S4	**P4-2.40B GHz** 6-704-128-01 IC RK80532PE056512SL6RZ	**MCel-1.8GHz** 6-703-826-01 IC RH80532NC033256
Memory	**512MB**(512MBx1) A-8067-880-A COMPLETE PWB MM-10	**256MB**(256MBx1) 6-600-158-01 IC HYS64D32020GDL-7-B	
HDD	**80GB** A-8067-943-A ASSY HDD 80GB(I,40)(S)	**60GB** A-8111-360-A ASSY HDD 60GB(T,30)(S)	**40GB** A-8113-859-A ASSY HDD 40GB(H)(S)
Optical	**DVD+-RW** 8-457-509-00 DVD DRIVE,DW-U50A-VN	**CD-RW/DVD-ROM** 1-796-594-11 COMBO DRIVE(UJDA740)	
Gigapo	○	×	
Battery	**PCGA-BP2NX** A-8067-763-A BP2NX SNT(J)ASSY(S)		

3. PCG-GRT100

Model name : PCG-GRT100P (American Area)
Model number : PCG-8M1R (With W-LAN), PCG-8M2R (W/O W-LAN)
OS:WindowsXP Pro
Ver.1.0

⚠ **[ADD]**

LCD	**16.1 UXGA(Clear Black)** A-8115-722-A LCD UNIT(16TFT-UXGA-HI)(S)	**16.0 SXGA** A-8112-385-A ASSY LCD SXGA 16(S)	**15.0 SXGA+** A-8110-581-A ASSY LCD 15SX(SH4)(S)	**15.0 XGA(High Brightness)** A-8115-790-A ASSY LCD 15XGA(SH)(S)	**14.1 XGA** A-8113-928-A LCD UNIT(14.1XGA)(H)(S)	**15 XGA** A-8113-853-A ASSY LCD 15(SH)GTS(S)
CPU	**P4-M2.5GHz** 6-704-320-01 IC RH80532GC060512	**P4-M2.2GHz** 6-703-846-01 IC RH80532GC049512	**P4-M2.0GHz** 6-703-333-01 IC RH80532GC041512-2	**P4-2.8GHz** 6-704-133-01 IC RK80532PE072512SL6S4	**P4-2.66GHz** 6-704-132-01 IC RK80532PE067512SL6S3	**P4-2.40B GHz** 6-704-128-01 IC RK80532PE056512SL6RZ
						MICP-1800 6-703-826-01 IC RH80532NC033256
Memory	**1024MB**(512MBx2) A-8067-880-A COMPLETE PWB MM-10	**512MB**(512MBx1) A-8067-880-A COMPLETE PWB MM-10	**512MB**(256MBx2) 6-704-094-01 IC MT8VDDT3264HDG-265C3	**256MB**(256MBx1) 6-704-094-01 IC MT8VDDT3264HDG-265C3		
HDD	**80GB** A-8067-943-A ASSY HDD 80GB(I,40)(S)	**60GB** A-8111-360-A ASSY HDD 60GB(T,30)(S)	**40GB** A-8113-859-A ASSY HDD 40GB(H)(S)	**30GB** A-8113-860-A ASSY HDD 30GB(H)(S)		
Optical	**DVD+-RW** 8-457-509-00 DVD DRIVE,DW-U50A-VN	**DVD-RW** 1-796-506-11 W-DVD(SD-R6012)	**CD-RW/DVD-ROM** 1-796-594-11 COMBO DRIVE(UJDA740)			
Battery	**PCGA-BP2NX** A-8112-427-A BP2NX SNT(U)ASSY(S)					

Model name : PCG-GRT100 (American Area)
Model number : PCG-8M1R (With W-LAN) ,PCG-8M2R (W/O W-LAN)
OS:WindowsXP Home
Ver.1.0

⚠ **[ADD]**

LCD	**16.1 UXGA(Clear Black)** A-8115-722-A LCD UNIT(16TFT-UXGA-HI)(S)	**16.0 SXGA** A-8112-385-A ASSY LCD SXGA 16(S)	**15.0 SXGA+** A-8110-581-A ASSY LCD 15SX(SH4)(S)	**15.0 XGA(High Brightness)** A-8115-790-A ASSY LCD 15XGA(SH)(S)	**14.1 XGA** A-8113-928-A LCD UNIT(14.1XGA)(H)(S)	**15 XGA** A-8113-853-A ASSY LCD 15(SH)GTS(S)
CPU	**P4-M2.5GHz** 6-704-320-01 IC RH80532GC060512	**P4-M2.2GHz** 6-703-846-01 IC RH80532GC049512	**P4-M2.0GHz** 6-703-333-01 IC RH80532GC041512-2	**P4-2.8GHz** 6-704-133-01 IC RK80532PE072512SL6S4	**P4-2.66GHz** 6-704-132-01 IC RK80532PE067512SL6S3	**P4-2.40B GHz** 6-704-128-01 IC RK80532PE056512SL6RZ
						MICP-1800 6-703-826-01 IC RH80532NC033256
Memory	**1024MB**(512MBx2) A-8067-880-A COMPLETE PWB MM-10	**512MB**(512MBx1) A-8067-880-A COMPLETE PWB MM-10	**512MB**(256MBx2) 6-704-094-01 IC MT8VDDT3264HDG-265C3	**256MB**(256MBx1) 6-704-094-01 IC MT8VDDT3264HDG-265C3		
HDD	**80GB** A-8067-943-A ASSY HDD 80GB(I,40)(S)	**60GB** A-8111-360-A ASSY HDD 60GB(T,30)(S)	**40GB** A-8113-859-A ASSY HDD 40GB(H)(S)	**30GB** A-8113-860-A ASSY HDD 30GB(H)(S)		
Optical	**DVD+-RW** 8-457-509-00 DVD DRIVE,DW-U50A-VN	**DVD-RW** 1-796-506-11 W-DVD(SD-R6012)	**CD-RW/DVD-ROM** 1-796-594-11 COMBO DRIVE(UJDA740)			
Battery	**PCGA-BP2NX** A-8112-427-A BP2NX SNT(U)ASSY(S)					

Model name : PCG-GRT100K (American Area)
Model number : PCG-8M1R (With W-LAN), PCG-8M2R (W/O W-LAN)
OS:Windows2000
Ver.1.0

⚠ **[ADD]**

LCD	**16.1 UXGA(Clear Black)** A-8115-722-A LCD UNIT(16TFT-UXGA-HI)(S)	**16.0 SXGA** A-8112-385-A ASSY LCD SXGA 16(S)	**15.0 SXGA+** A-8110-581-A ASSY LCD 15SX(SH4)(S)	**15.0 XGA(High Brightness)** A-8115-790-A ASSY LCD 15XGA(SH)(S)	**14.1 XGA** A-8113-928-A LCD UNIT(14.1XGA)(H)(S)	**15 XGA** A-8113-853-A ASSY LCD 15(SH)GTS(S)
CPU	**P4-M2.5GHz** 6-704-320-01 IC RH80532GC060512	**P4-M2.2GHz** 6-703-846-01 IC RH80532GC049512	**P4-M2.0GHz** 6-703-333-01 IC RH80532GC041512-2	**P4-2.8GHz** 6-704-133-01 IC RK80532PE072512SL6S4	**P4-2.66GHz** 6-704-132-01 IC RK80532PE067512SL6S3	**P4-2.40B GHz** 6-704-128-01 IC RK80532PE056512SL6RZ
						MICP-1800 6-703-826-01 IC RH80532NC033256
Memory	**1024MB**(512MBx2) A-8067-880-A COMPLETE PWB MM-10	**512MB**(512MBx1) A-8067-880-A COMPLETE PWB MM-10	**512MB**(256MBx2) 6-704-094-01 IC MT8VDDT3264HDG-265C3	**256MB**(256MBx1) 6-704-094-01 IC MT8VDDT3264HDG-265C3		
HDD	**80GB** A-8067-943-A ASSY HDD 80GB(I,40)(S)	**60GB** A-8111-360-A ASSY HDD 60GB(T,30)(S)	**40GB** A-8113-859-A ASSY HDD 40GB(H)(S)	**30GB** A-8113-860-A ASSY HDD 30GB(H)(S)		
Optical	**DVD+-RW** 8-457-509-00 DVD DRIVE,DW-U50A-VN	**DVD-RW** 1-796-506-11 W-DVD(SD-R6012)	**CD-RW/DVD-ROM** 1-796-594-11 COMBO DRIVE(UJDA740)			
Battery	**PCGA-BP2NX** A-8112-427-A BP2NX SNT(U)ASSY(S)					

5-8

5-9
(END)

PCG-GRT99/GRT77/GRT55 (J)
PCG-GRT170/GRT150/GRT25F/GRT160 (AM)
PCG-GRT716S/GRT796HP/GRT715E/GRT795MP/GRT715M/
PCG-GRT796SP/GRT786M/GRT785B/GRT785E (EU)
PCG-GRT30P/GRT25/GRT30LP/GRT30CP/GRT25CP/GRT25L (AO)

VAIO

PCG-GRT99/GRT77/GRT55 (J)
PCG-GRT170/GRT150/GRT25F/GRT160 (AM)
PCG-GRT716S/GRT796HP/GRT715E/GRT795MP/GRT715M/GRT796SP/GRT786M/GRT785B/GRT785E (EU)
PCG-GRT30P/GRT25/GRT30LP/GRT30CP/GRT25CP/GRT25L (AO)

List of PCG-GRT Series (As of June, 2005)

Model Name	Service Manual Part No.
PCG-GRT99/P	
PCG-GRT77/B	
PCG-GRT55/B	
PCG-GRT170	
PCG-GRT150	
PCG-GRT716S	
PCG-GRT796HP	
PCG-GRT715E	
PCG-GRT795MP	
PCG-GRT715M	
PCG-GRT25F	
PCG-GRT796SP	9-876-309-XX/
PCG-GRT30P	
PCG-GRT25	
PCG-GRT160	
PCG-GRT30LP	
PCG-GRT30CP	
PCG-GRT25CP	
PCG-GRT786M	
PCG-GRT785B	
PCG-GRT785E	
PCG-GRT25L	

9-876-309-08

Sony Corporation
— 53 —

Japanese/English
2005F0500-1
© 2005 Sony Corporation
Published by Sony EMCS NAGANO TEC

Revision History

Suffix	Ver.	Date		Contents	QM No.
-01	Ver. 1	2003.06.09		First Edition	
-02	Ver. 2	2003.06.18	△1	Front Page (Model Line Up), Page 1-1, Page 1-2, Page 4-1 - 4-18, Page 4-23, Page 4-24, Page 4-27, Page 4-28, Page 4-31 - 4-34, Page 5-1, Page 5-2, Back Cover	N2003_035AK
-03	Ver. 3	2003.07.17	△2	Front Page (Model Line Up), page 1-1 - 1-2, Page 4-1 - 4-18, Page 4-23 - 4-28, Page 4-31 - 4-33, Back Cover	N2003_042AK
-04	Ver. 4	2003.08.07	△3	Front Page (Model Line Up), Page 1-1 - 1-2, Page 4-1 - 4-18, Page 4-21 - 4-22, Page 4-27 - 4-28, Page 4-31 - 4-33, Back Cover	N2003_049AK
-05	Ver. 5	2003.08.08	△4	Front Page, Page 4-8, Page 4-10, Page 4-12, Page 4-15 - 4-18, Page 4-20, Page 4-22, Page 4-32, Back Cover	N2003_051CK
-06	Ver. 6	2004.08.06	△5	Front Page, Page 1-1_1-2, Page 4-5_4-6, Page 4-20, Page 4-22, Page 4-24, Page 4-26 Page 4-28, Page 4-29_4-30, Page 5-9, Back Cover	N2004_087CK
-07	Ver. 7	2005.02.07	△6	Page 3, Page 4-1, Page 4-7, Page 4-11, Page 4-13_4-14, Page 4-17, 4-20	N2004_152CK
-08	Ver. 8	2005.06.09	△7	Page 4-13	N2005_025CK

<Remarks>